

MSB550W

Outdoor Weather Resistance Mechanical Switch Bar



SDC's MSB550W is designed to release electromagnetic door locks for uninhibited egress in outdoor weather exposed applications. When slight pressure is applied a microswitch is actuated, immediately releasing the electromagnetic door lock, making it the perfect Gate Lock companion. The MSB5500W is an economical alternative to sensor activated bars.



FEATURES

- **Water Sealed Switches**

The MSB550W features a high-quality watertight miniature snap action switch with a monoblock construction, ensuring high sealing capacity. Switch body meets IP67 (IEC 529) requirements.

- **Heavy Duty Construction**

The MSB550W utilizes heavy-duty aluminum extrusion and rugged end caps. The mounting assembly is all metal. The rigid construction prevents any malfunction.

- **Only 1/8" Total Bar Movement**

The MSB550W has a maximum movement of only .125". Trigger activation to release the electromagnetic lock is quick and quiet.

- **Perfect Companion for Gate Lock Solutions**

The MSB550W's watertight switches makes it a perfect companion for outdoor gate solutions. For additional system components, see back page.



MODELS

MSB550-2VW 628 Aluminum Anodized

MSB550-2YW 335 Black Anodized




SPECIFICATIONS

Electrical Specifications

Contact	2 SPDT, 3 Amp @ 30VDC (RESISTIVE)
Operating Temperature	-40°F to 185°F



included with bar

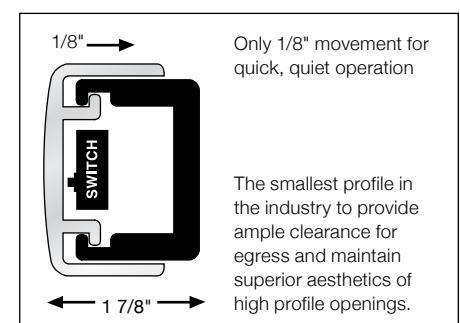

PRODUCT SKU SAMPLE: **MSB550-2V 42 W**

HOW TO ORDER

1| SPECIFY MODELS

PT-3 Power Transfer included

MSB550-2VW 628 Aluminum Anodized

MSB550-2YW 335 Black Anodized

2| SPECIFY OPTIONS

Standard Length: 36" Door

Bars for Wide Doors:

42 For 42" Wide Door. May be field cut.

48 For 48" Wide Door. May be field cut.



GATE EMLOCK® SOLUTIONS / ACCESSORIES

1 GATE MAGNETIC LOCK

1575U Gate Magnetic Lock

1576U Gate Magnetic Lock with face drilled mounting

2 GATE MOUNT BRACKETS

1575BK / 1576-ZBV / Application Specific Brackets

1576-AB / 1576-BK

3 OUTDOOR ACCESS CONTROL

923 Narrow Stand Alone Digital Keypad


4 Request-To-Exit

48201U ADA approved Narrow Mullion Push Plate Switch

Outside

1575 Gate EMLock® Solutions


Inside

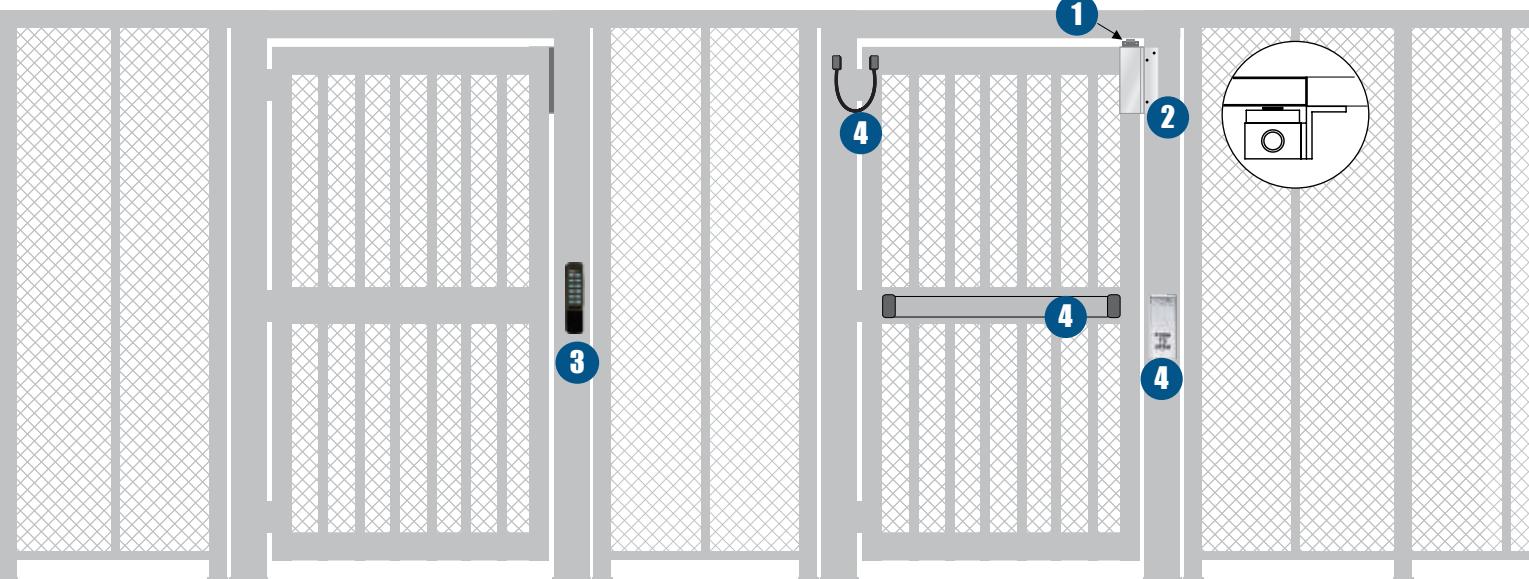

Outside

1576 Gate EMLock® Solutions

Inside

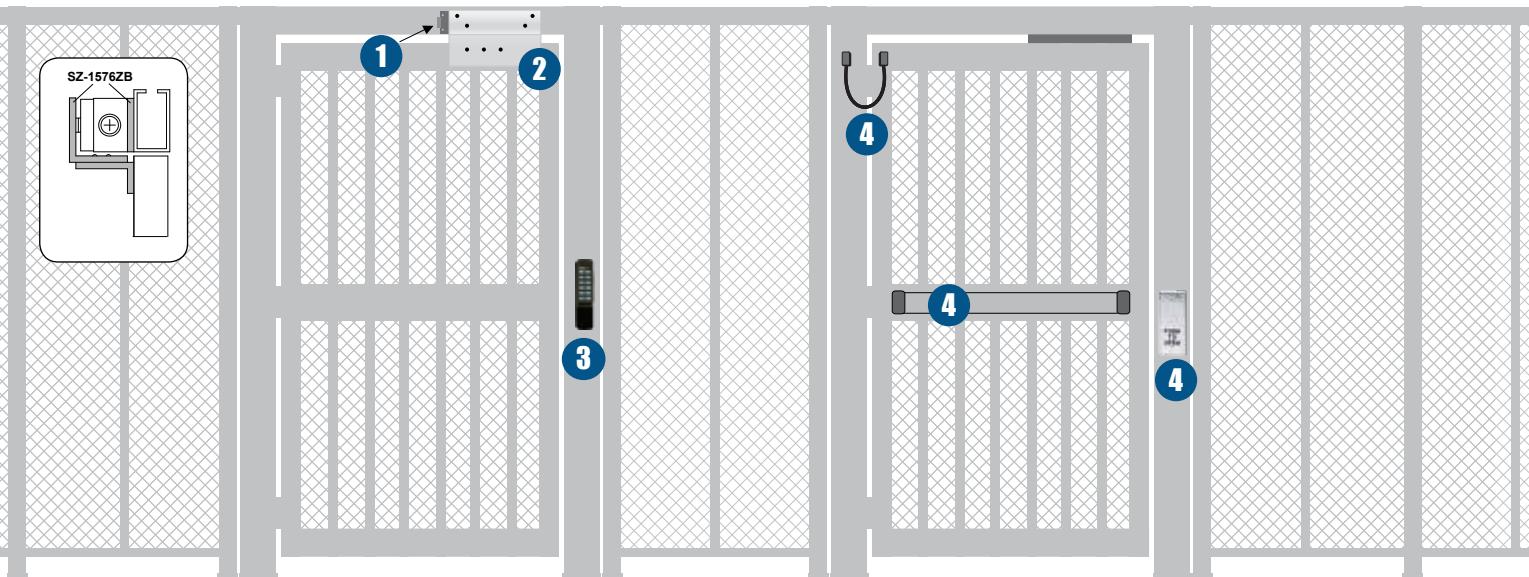

© 2016 SECURITY DOOR CONTROLS ■ WWW.SDCSECURITY.COM

[t] 800.413.8783 ■ 805.494.0622 ■ [f] 805.494.8861 ■ 801 Avenida Acaso, Camarillo, CA 93012 ■ PO Box 3670, Camarillo, CA 93011

LIT-MSB550W WEATHERIZED MECHANICAL SWITCH BAR 04/16