


632RF Series 2 Amp

Modular Access Control Power Supply

The SDC 632RF Power Supplies have been developed specifically to support electric locks and access controls. The high performance, heavy-duty circuitry is ideal for inductive loads and its modular design provides a well organized installation for individual or multi-door systems that may include locking devices, access controls, station controls and consoles for remote control, annunciation and fire/life safety system interfaces.

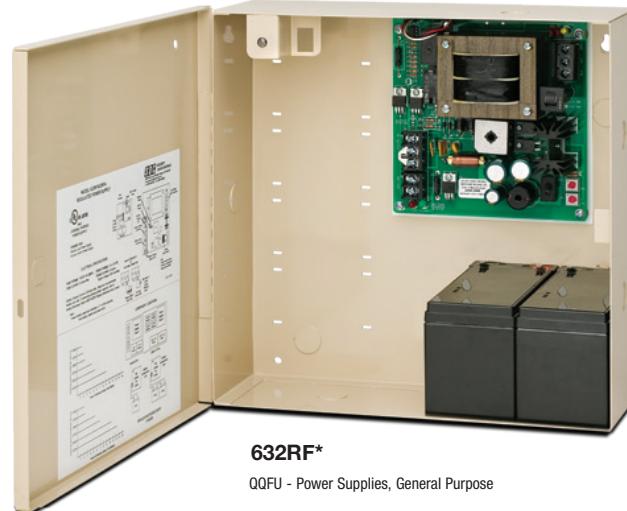

632RF*

QQFU - Power Supplies, General Purpose



FEATURES

- Filtered and Regulated**
The output filtering stabilizes the DC output voltage and eliminates AC line noise. The solid state regulator maintains the selected output voltage at 12VDC or 24VDC regardless of the output load changes, including battery charging.
- Field Selectable 12 or 24VDC**
The output is field selectable for 12 or 24VDC output.
- Battery Charger Output**
A separate PTC protected, battery charger output provides 13.5VDC or 27VDC.
- LED System Status Indicator**
Amber - AC and DC voltages are OK
Green - No DC output
Red - No AC input, powered by batteries
- Emergency Release Input (Standard)**
A signal input from the fire life safety system turns off the secondary output releasing all failsafe locks. When not used for emergency release, this input may be used as main on-off control.
- Large Heavy Gauge Enclosure**
Model 632RFA is housed in a 16 gauge, 16"W x 14"H x 6.5"D cabinet large enough to accommodate several additional modules and six 8 Amp hour batteries with plenty of room for wiring.
- Class 2 Output**
Where permitted by code, conduit is not required for the Class 2 output.

* shown with optional batteries

- California Compliant Manual Reset of Emergency Release and AC Power Loss (Optional)**
When this feature is required, should an AC power loss occur or the emergency release input is actuated, personnel must restore secondary output power manually at the power supply after the emergency release signal is reset and/or AC power is restored.
- Low Battery Disconnect (Standard)**
Batteries are disconnected from the output circuit prior to deep discharge preventing battery destruction.
- Isolated Charging Circuit (Standard)**
While the charging output is 13.5VDC or 27VDC, the secondary output is unaffected and precisely maintained at the selected 12 or 24VDC. This ensures system components are powered by their specified voltage. The secondary output current is maintained at the full 2 Amp capacity and is not de-rated when charging batteries.



632RFL



MODELS

632RFL Power Supply (less cabinet)



632RF Power Supply, plus 12" W Cabinet



632RFA Power Supply, plus 16" WCabinet





SPECIFICATIONS

Electrical

Input	115VAC @ 800mA, 50/60 Hz, Fused. (220/230VAC 50/60 Hz optional)
Secondary Output	Selectable 12VDC or 24VDC @ 2 Amp, poly fuse protected, Class 2
Battery Charger Output	PTC protected 250mA @ 13.5 or 27VDC

TABLE 1: CONTROL MODULE CAPACITY*

Power Supply:	632RF		632RFA			
	Battery Qty.		0-2	3-6	0-2	3-4
			RB12V4		RB12V7	
FB4	4	2	4	4		
12VR	4	2	4	4		
PSM	1	1	1	1		
UR-1	4	2	4	2		
UR2-4	NA	NA	2	1		
UR4-8	NA	NA	2	1		
CR-4	2	1	4	2		
ACM-1	2	1	4	2		
PB-8, PB-16	2	2	2	2		

* Total combined load of modules and access control hardware may not exceed 2 amp.

TABLE 2: 12VDC STANDBY POWER

5 Ah Battery Qty	1	2	4	6
Amp Hours	5Ah	10Ah	20Ah	
Load/Amps	Power Back-up Time in Hours			
0.25	19.6	49	124	
0.50	7.8	20	49	
1.00	3.8	11.3	19.4	
1.50	1.8	4.5	11.3	

8 Ah Battery Qty	1	2	4	6
Amp Hours	8Ah	16Ah	32Ah	48Ah
Load/Amps	Power Back-up Time in Hours			
0.25	36.7	85	175	400
0.50	15	36	85	157
1.00	6.5	14.4	36	62
1.50	4	9	21	36

TABLE 3: 24VDC STANDBY POWER

5 Ah Battery Qty	2	4	6
Amp Hours	5Ah	10Ah	20Ah
Load/Amps	Power Back-up Time in Hrs		
0.25	250	40	
0.50	8.5	20	
1.00	3.8	8.5	
1.50	2.3	5.5	

8 Ah Battery Qty	2	4	6
Amp Hours	8Ah	16Ah	24Ah
Load/Amps	Power Back-up Time in Hrs		
0.25	36.7	85	158
0.50	15	36	62.7
1.00	6.5	14.4	24.8
1.50	4	9	15

PRODUCT SKU SAMPLE: 632RFA PS-1A UR4-8

HOW TO ORDER

1| SPECIFY MODEL

- 632RFL** 2 Amp, Class 2 Output, Less Cabinet
- 632RF** 2 Amp, Class 2 Output, 12"W Cabinet
- 632RFA** 2 Amp, Class 2 Output, 16"W Cabinet

2| SPECIFY OPTIONS

- MR** Cover Mounted Manual Reset Switch for Fire/Emergency Release
- PS-1** System On-Off Push Switch inside Power Supply Enclosure
- PS-1A** System On-Off Push Switch on Enclosure Cover
- 14-2** 7 Day – Skip a Day Programmable Timer
- PC** 6 ft. Power Cord
- KL** Key Lock Cover
- 220V/230V** 230VAC, 50/60Hz

3| SPECIFY CONTROL MODULES

- 12VR** 12VDC Regulated and Filtered Output Module
- FB-4** Four 2 Amp fuse protected outputs
- PSM** Power Supply Remote Monitoring Module
- UR1** Universal Door Controllers
- UR2-4** Two Station Door Controllers
- UR4-8** Four Station Door Controllers
- CR4** Control Relay - 4 Independent DPDT Relays
- ACM-1** Access Control Module
- PB-8** 8 Amp Power Booster
- PB-16** 16 Amp Power Booster

see page <?> for more info on control modules



ACCESSORIES

- RB12V4** 12V/5Ah Battery, 632RF Capacity, 4 Max
- RB12V7** 12V/8Ah Battery, 632RFA Capacity, 6 Max



© 2017 SECURITY DOOR CONTROLS ■ WWW.SDCSECURITY.COM

[t] 800.413.8783 ■ 805.494.0622 ■ [f] 866.215.3138 ■ 801 Avenida Acaso, Camarillo, CA 93012 ■ PO Box 3670, Camarillo, CA 93011

LIT-632 SERIES POWER SUPPLIES 04/17