

DOOR HOLDER - Wall Flush Mounted DH509 SERIES

DOOR
HOLDER



DH509



S-AP702
60L*60W*
55.5H mm
(default)



S-AP702E
outer dia:Ø92mm
inner dia:Ø63.3mm*
24~28.7Hmm




S-AP702F
60L*60W*24H mm



S-AP702G
60L*60W*
93.6~102.6H mm
(height adjustable)

- DH509 : 150.5L*150.5W*32.5H mm

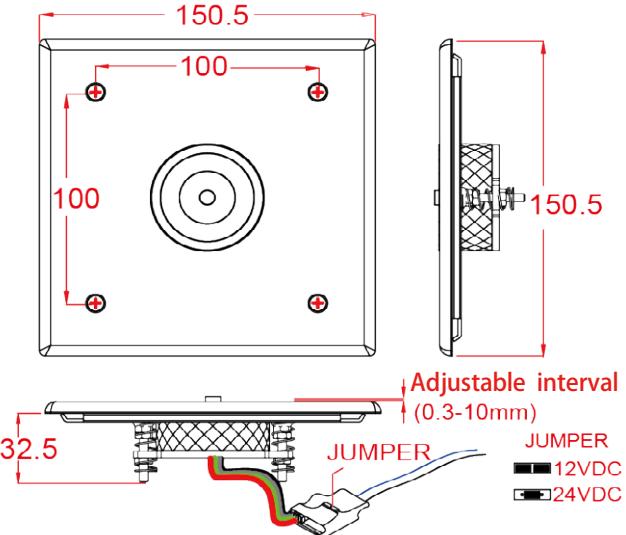

▼ ORDERING INFORMATION

DH509	S	X	Adjustable armature plate (default)
			E-morticed armature plate
			F-fixed armature plate
			G-extended armature plate

Sensor

Wall Flush Mounted

EXAMPLE :

- DH509 : Wall Flush Mounted, w/adjustable armature plate
- DH509S : Wall Flush Mounted, With Sensor . adjustable armature plate

▼ SPECIFICATION


- Holding Force : about 100LBS
- Built-in voltage spike suppressor
- Sensor : optional
- Adjustable Distance : 10 mm
- Voltage : 12V/ 24VDC (Selectable)
- Current Draw : 100mA/12VDC ,
50mA/24VDC

▼ FEATURES


- Wall flush mounted installation
- Suitable for fire escape doors in large-scale buildings.
- It releases the armature plate to allow the door closer to close the door when a fire alarm or emergency is detected, to keep smoke in a limited area.
- Adjustable, fixed, extended, or morticed armature plate

▼ ARMATURE PLATE INSTALLATION

- Adjustable Armature Plate (default): applicable for environments with angle differences between the door and the wall

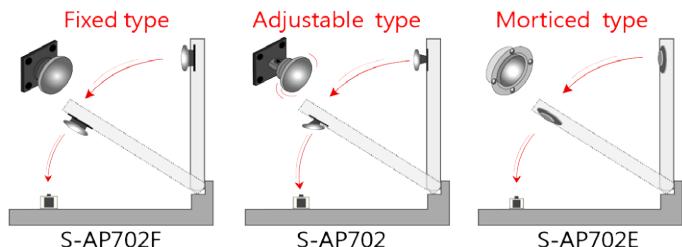

▼ APPLICATION

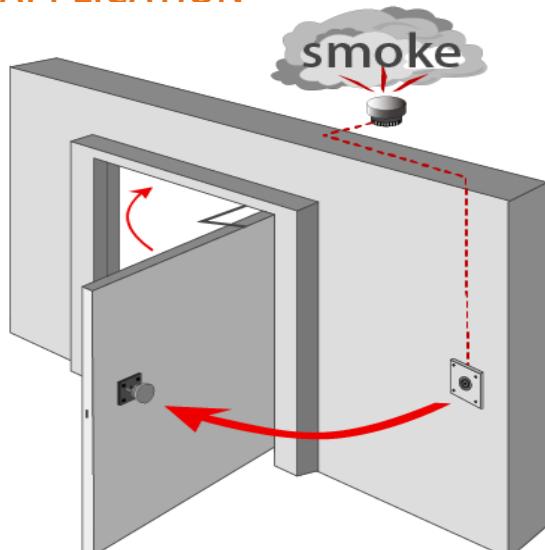

DH509 Wall flush mounted