




ELECTRIC BOLTS - ML270 SERIES slim profile

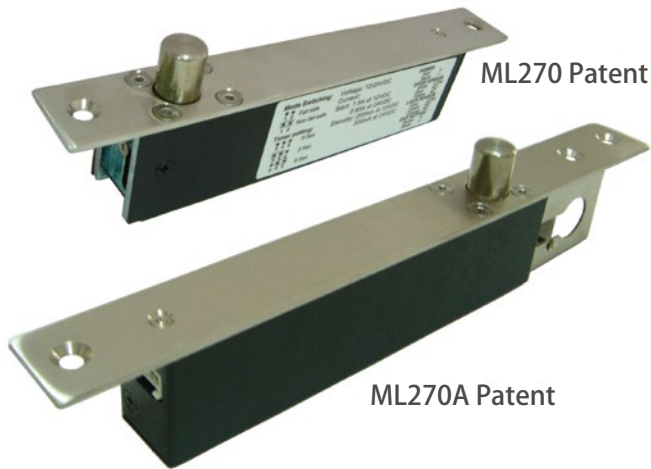

- ML270 : 200L*27W*38.5H mm

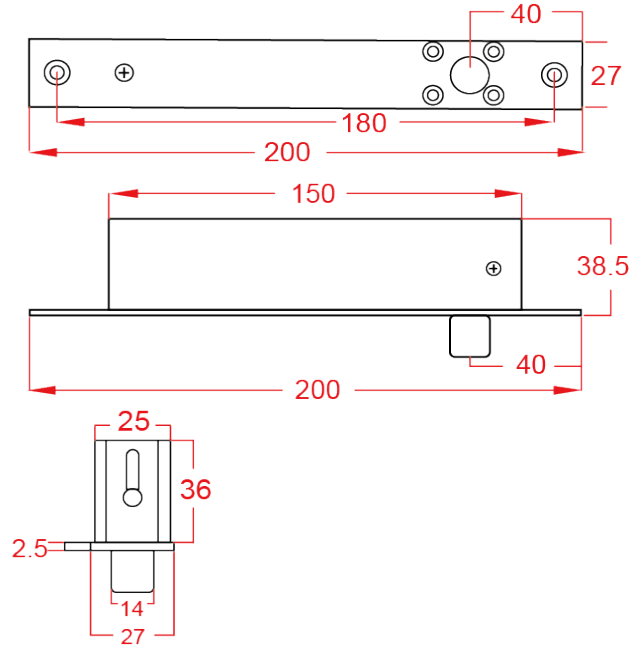

- ML270A : 245L*27W*38.5H mm

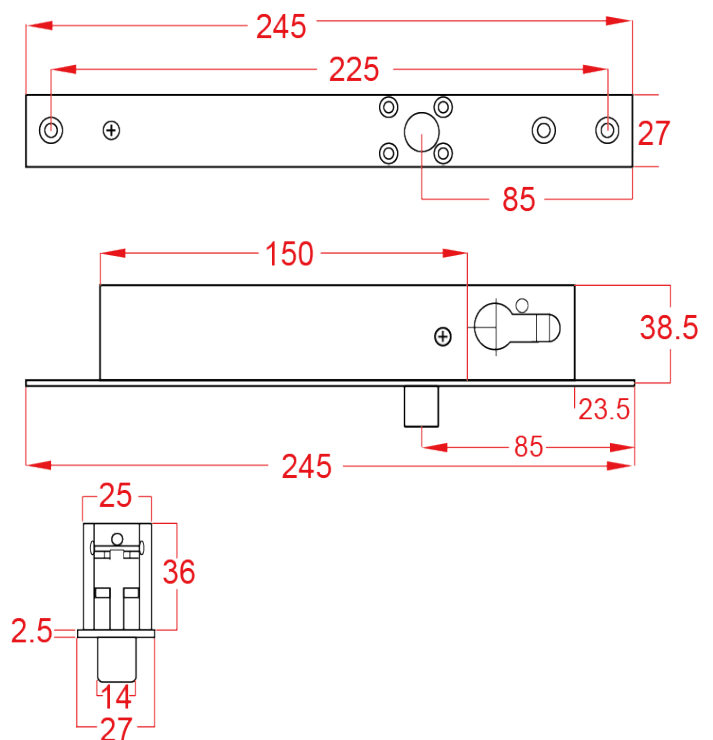

ELECTRIC BOLTS

▼ ORDERING INFORMATION

ML270 / ML270A

— Slim profile

— W/Lock cylinder

EXAMPLE :

- ML270 : Slim profile electric bolt W/Door, Lock status sensor
- ML270A : Slim profile electric bolt, W/Door, Lock status sensor, Lock cylinder

▼ SPECIFICATION

- Suitable for double swing door
- Dual Mode : fail-secure / Fail-safe on site reversible
- Monitor : double -door and lock status sensor
- Timer : selectable 0 , 3 , 6 SEC
- Cylinder Lock (ML 2 7 0 A only) : for emergency opening
- Face Plate Material : Stainless Steel
- Fire resistant
- Voltage : 12VDC~24VDC
- Current Draw :
Start : 1.5A/12VDC , 0.85A/24VDC
Standby : 0.3A/12VDC , 0.2A/24VDC