



40 SERIES

Narrow Stile Rim Exit Device

The 40 Series **rim exit device** is super-heavy-duty **panic** and **fire exit hardware** for use on all types of narrow stile single and double doors with mullions. The patented mounting plate and strike locator system ensures the easiest and most accurate installation of panic hardware available.



ANSI 156.3 - 2008
Grade 1
Type 4

Benefits -

- Tough and durable design for years of trouble-free service in high-use, high-abuse environments
- Fast and accurate installation
- Minimal door prep saves time and money
- Outside trims are easily changed or re-keyed without removing device from door

Features -

- Patented mounting plate and strike locator system replaces paper templates
- All exposed surfaces are finished over stainless steel with PVD, an environmentally-friendly finishing process
- Non-handed
- Stainless steel deadlocking, Pullman-type latch bolt
- Heavy-duty angled end-cap deflects damage away from device
- Field sizeable
- 1/8 turn hex or cylinder dogging

Mechanical Options -

- F - 3 Hour Fire Rated
- CD - Cylinder Dogging
- 99 - Surface Strike
- H - Hurricane Rated
- LD - Less Dogging
- 36 - Fits 36" Door Width (Std.)
- HD - Hex Dogging (Std.)
- 98 - Semi Mortise Strike (Std.)
- 48 - Fits 48" Door Width

Electrical Options -

- Exit Alarm (EA)
- Electric Unlock (EU2W)
- Request to Exit Weatherized (EXxW)
- Electric Dogging (ED)
- Latch Bolt Signaling (LX)
- Request to Exit Weatherized for High Voltage (EXVxW)
- Electric Integration (EI)
- Latch Bolt Signaling for High Voltage (LXV)
- Delayed Egress - Self Contained (EE)
- Electric Switching (ES)
- Refer to Electrified Options section for more information
- Delayed Egress with Latch Retraction (EExER)
- Request to Exit (EX)
- Delayed Egress - Mag Lock (EM)
- Request to Exit for High Voltage (EXV)

Accessories -

- GB2 - Glass Bead Kit
- SSK - Security Torx Screw Kit
- SN1 - Sex Nut Kit (2 per package)
- Trim Functions (see Outside Trims)
- Electrified Options (see Electrified Options)


Technical Information -

- Door Types - Wood, Hollow Metal, Fiberglass or Aluminum
- Minimum Stile - 2" with standard 98 strike; 2-1/2" with optional 99 strike
- Door Thickness - Fits standard 1-3/4" - 2-1/4" doors (for other door thicknesses contact factory)
- Fasteners - Machine and Self-Drilling Screws standard


Finishes -

605 / US3	Polished Brass	628 / US28	Aluminum Satin	693 / SPBLK	Black, Painted
606 / US4	Brushed Brass	629 / US32	Polished Stainless Steel	695 / SP 313	Dark Bronze, Painted
611 / US9	Polished Bronze	630 / US32D	Brushed Stainless Steel		
612 / US10	Brushed Bronze				
613 / US10B	Oil Rubbed Bronze				


Single Door -

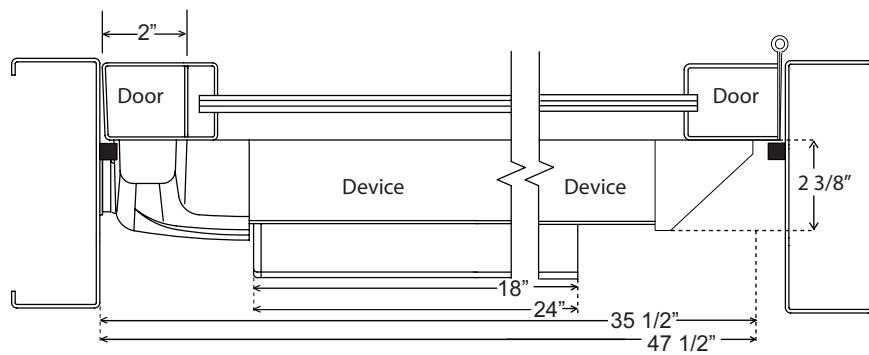

Double Door with 90KR Mullion -

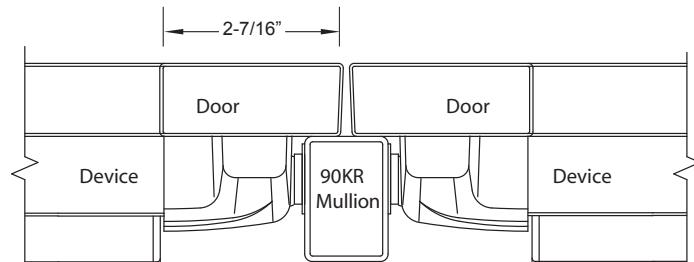

Dimensions -

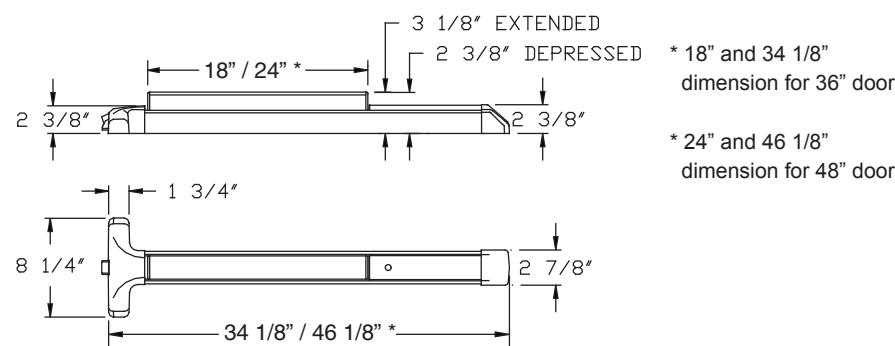

Listings and Approvals -

- UL Listed Panic Hardware
- UL Listed Fire Exit Hardware for 3 hours, maximum 4'x10' single doors and pairs of 4'x8' with F90KR key removable Mullion
- Meets ADA requirements
- UBC 97, Standard 7-2 and UL10C for positive pressure
- BHMA CERTIFIED ANSI/BHMA certified A156.3
- Meets NFPA 80 & 101 for Life Safety
- Miami-Dade County, Florida NOA 10-0303.02 EXP. 04/07/15 State of Florida Approval FL9052
- California State Fire Marshall - 4140-0127:105 and 3725-0127:108

Detex Limited Warranty -

10 Year Mechanical/3 year Electrical Limited Manufacturer's Warranty



Life Safety and Security Door Hardware

Detex Corporation
302 Detex Drive
New Braunfels, Texas 78130-3045 USA
PH. (830) 629-2900
(800) 729-3839
FAX (830) 620-6711
(800) 653-3839
<http://www.detex.com>
USA Sales:
marketing@detex.com
International Sales:
export@detex.com