


ELECTRIC BOLTS - ML203 SERIES



ML203

- ML203 : 200L*34W*46H

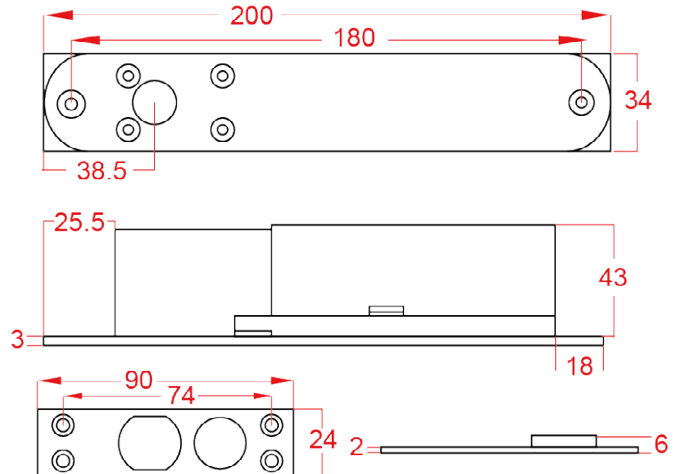

▼ ORDERING INFORMATION

ML(R)203 S L D

Round plate Door status sensor
Lock status sensor

EXAMPLE :


- ML203SL : With lock status sensor
- ML203SLD : With lock and door status sensor
- MLR203SLD : Round plate, with lock and door status sensor

▼ SPECIFICATION

- Suitable for double swing door
- Fail-safe : Locked when energized
- With door and lock status sensor
- Built-in voltage spike suppressor
- Face plate Material : Aluminum
- Cover plate : Stainless Steel
- Weight : 0.9KGS
- Voltage : 12VDC
- Current Draw :
Puli-in : 1A / 12VDC
Holding : 0.3A / 12VDC

▼ AUTOLOCK TIME DELAY SETTING

- Use jumper to select auto-lock time delay (0 , 2.5 , 6 secs)

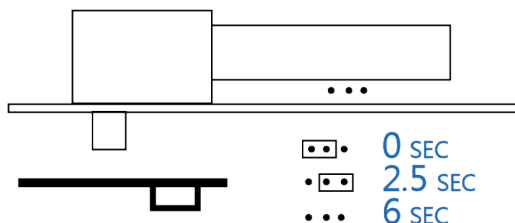

▼ BRACKETS INSTALLATION



UG202



U-200 / UG201



UG200