

# ES3000 Monitored Series Electric Strike

## General Description

The ES3000 series electric strikes are designed for high security applications and manufactured from solid stainless steel.

These long ANSI strikes offer a strong dependable and long-lasting electric strike solution and are suitable for use with any access control system.

These strikes are extremely flexible and can be changed from fail safe to fail secure and mounted on the left or right hand side of the door, thus reducing the amount of stock needed to cover each application.

## Key Features

- Fail safe/fail secure changeable on site
- Available in 12 or 24Vdc
- 850kg holding force
- 1 million cycles endurance rating
- Stainless Steel locking pins
- Continuously rated solenoid
- Optional mounting kit
- Australian designed
- **TRICARE® 5 Year Warranty**

## Applications

- Timber or metal doors
- Open in/open out doors
- Suitable for use with all access control systems



## Standards and Compliance



Approved to UL1034 (highest level)




CE Approved




C-Tick Certified

# ES3000 Monitored Series Electric Strike

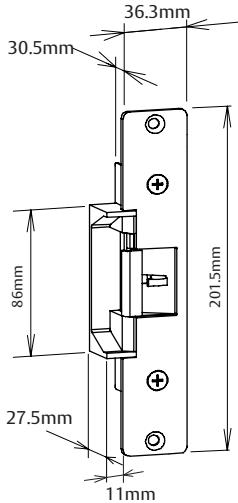

ES3000 ANSI Extension Lip

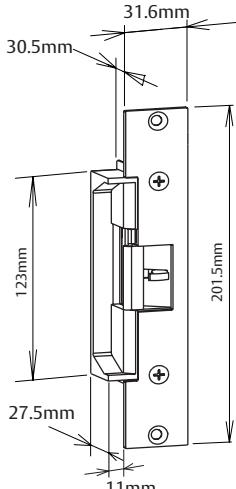

ES3000 Harcor Face Plate Wide Extension Lip

## ES3000 Technical Information

<b>Voltage</b>	12 or 24Vdc
<b>Current</b>	175mA @ 12Vdc – 88mA @ 24Vdc
<b>Solenoid</b>	Solenoids rated for continuous use
<b>Monitoring</b>	Solenoid Monitor - 1 amp NO/NC microswitch Door / Latch - 1 amp NO/NC microswitch
<b>Holding Force</b>	850kg static strength rating
<b>Endurance</b>	Cycle tested to 1,000,000 operations
<b>Environment</b>	Operational temperature range -20°C to +60°C
<b>Body</b>	Solid stainless steel construction
<b>Keeper</b>	Stainless Steel

## Specification Statement

The strike should be constructed of solid stainless steel, have a minimum holding force of 850kg and have an endurance rating of 1 million cycles. Monitoring must include independent door / latch & solenoid monitoring. The one strike must be changeable from fail safe to fail secure on site where required. The strike should not consume current greater than 175mA @ 12Vdc and have a solenoid rated for continuous use. Certifications must include CE and C-Tick.

## Ordering Information

Product Description	Part Number
<b>ES3000 Series - ANSI Extension LIP</b>	
12V Fail Safe Large Stainless Steel Faceplate	113101-000
<b>ES3000 Series - Wide Extension LIP</b>	
12V Fail Safe Large Stainless Steel Faceplate (SEC)	113201-030
24V Fail Safe Large Stainless Steel Faceplate (SEC)	113203-030