



ELECTRIC BOLTS - ML250L SERIES SMART FAIL-SAFE

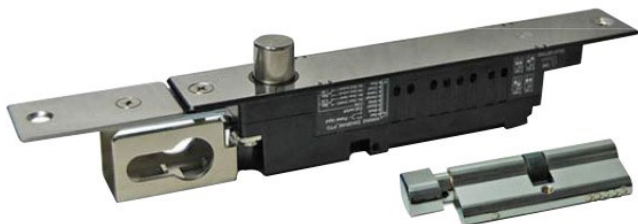

ML250L

- Faceplate : 193L*25.4W*2T mm
- Lock Body : 150L*25.4W*33H mm
- Strike plate : 102.55L*25.4W*2~2.5Tmm

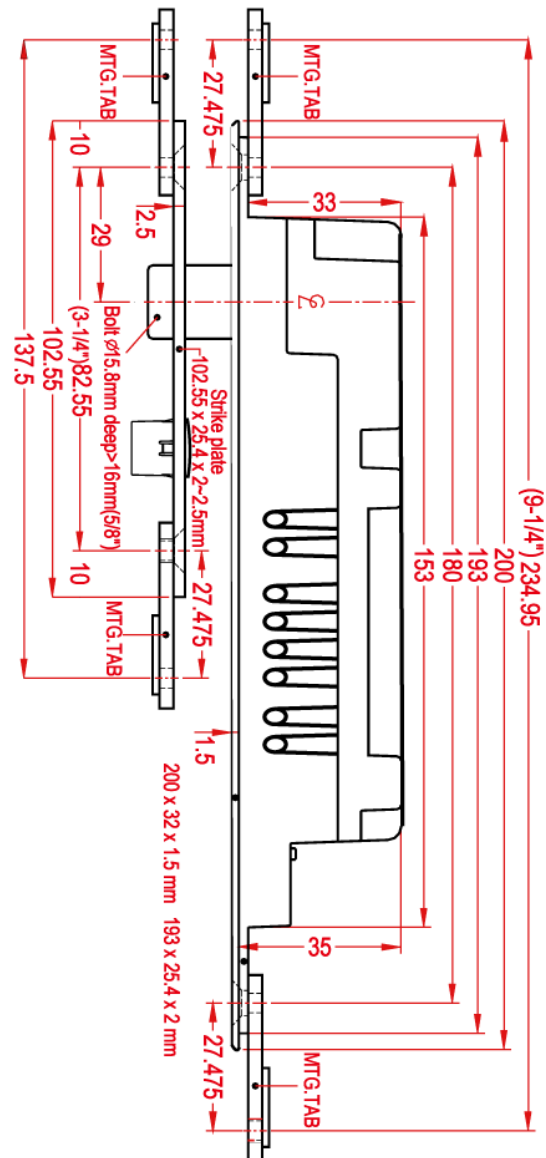

ELECTRIC
BOLTS

▼ ORDERING INFORMATION

ML250L L D - C

W/Lock cylinder
Door status sensor
Lock status sensor
Fail safe

EXAMPLE :

- ML250LL : Smart , Fail safe , With Lock status sensor , bi-color LED
- ML250LLD : Smart , Fail safe , With Lock status sensor , Door status sensor , bi-color LED
- ML250LLD-C : Smart , Fail safe , bi-color LED , With Lock status sensor , Door status sensor , Lock cylinder

▼ SPECIFICATION

- Suitable for double swing door
- Fail safe : Locked when energized
- Built-in bi-color LED, Time delay
- Lock Body Temperature : <40 °C (under room temperature 25 °C)
- Bolt length : 16mm (5/8")
- Bolt dia : 15.8mm (5/8")
- Voltage: 12VDC / 24VDC (Selectable)
- Current Draw:
 - Star : 1.2A/12VDC : 0.68A/24VDC
 - Standby : 0.2mA/12VDC
 - 0.15mA/24VDC
- Dss Relay : COM , NO , NC (MAX.3W ; 30VDC ; 0.2A)
- Lss Relay : COM , NO , NC (MAX.30VDC ; 1A)

▼ TIME DELAY

Open Delay	0sec.	3sec.	6 sec.	9 sec.
	☐ ON	☐ ON	☐ ON	☐ ON
	☐ 1	☐ 1	☐ 1	☐ 1
	☐ 2	☐ 2	☐ 2	☐ 2
Close Delay	0 sec.	3 sec.	6 sec.	9 sec.