


DOOR HOLDER - ^{wall} mounted DH502P SERIES




- DH502P : 88.5L*74.5W*34H mm

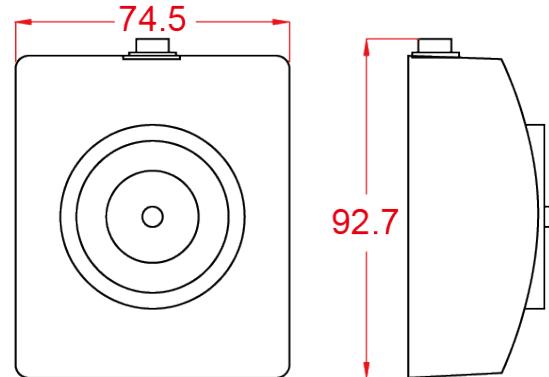

DOOR
HOLDER

▼ ORDERING INFORMATION

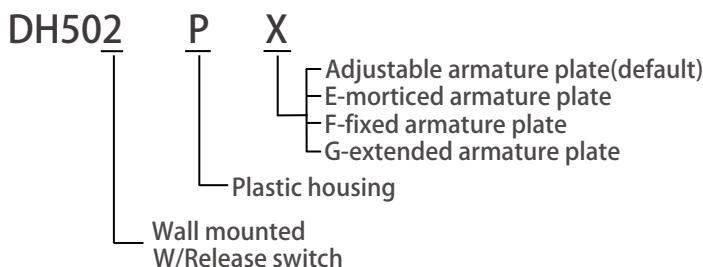

EXAMPLE :

- DH502P : Wall mounted, w/adjustable armature plate, w/release switch, w/plastic housing
- DH502PF : Wall mounted, w/fixed armature plate, w/release switch, w/plastic housing

▼ SPECIFICATION


- Holding Force : about 100LBS
- Built-in voltage spike suppressor
- Sensor : optional
- Voltage : 12V / 24VDC (Selectable)
- Current Draw : 100mA / 12VDC, 50mA / 24VDC

▼ FEATURES

- Suitable for fire escape doors in large-scale buildings.
- it releases the armature plate to allow the door closer to close the door when a fire alarm or emergency is detected, to keep smoke in a limited area.
- With Release Switch : to release the door for other purposes (e.g. function test)
- Adjustable or fixed armature plate
- Polished and lighter ABS housing

▼ ARMATURE PLATE INSTALLATION

- Adjustable Armature Plate(default): applicable for environments with angle differences between the door and the wall

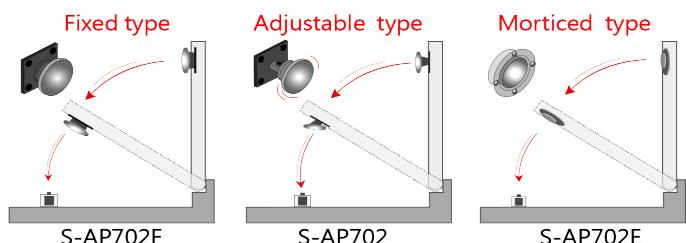

▼ APPLICATION

