


The Adams Rite 4720ANSI is for use in hollow metal or wooden doors and offers flexible traffic control and a good level of security.

When used in emergency exit applications with a 4591 Paddle Handle the 8360 ramped jaw strike must be fitted to conform with BS EN179:2008

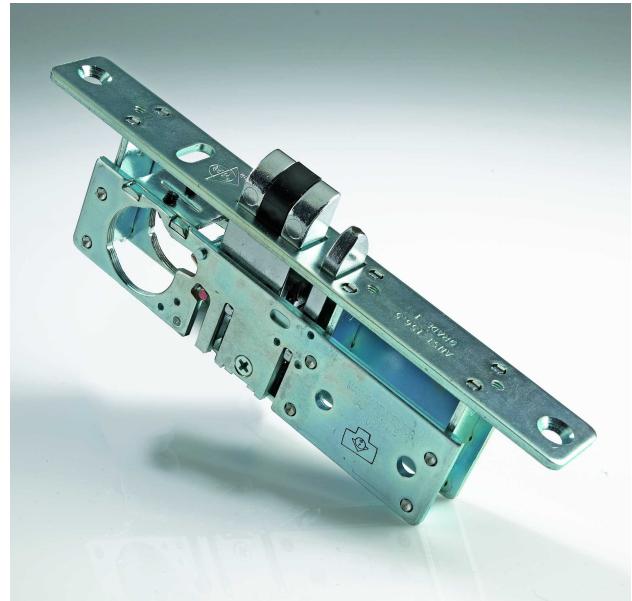


### Key Benefits

- Is interchangeable without stile modification with the MS® 1850SNSI Deadlock
- It is often used in conjunction with the 7100/7400 series Electric Strikes to provide remote access control
- Accepts any standard mortice cylinder, thumbturn (both with MS® cam) or 4591 Paddle handle (with 4580 cam plug)
- Designed for use on timber and steel doors.
- Independantly tested to 1 million cycles

### Related Hardware

Round Cylinders ~ MS®4043 Cylinder Guard ~ Round Thumbtturns  
4565 Thumbtturn ~ 4568 Lever Handle ~ 4591 Paddle Handle  
~ 4590 Timber Mounting Plate ~ 8360 Ramp Jaw Strikes ~ 7100/7400 Series Electric Strikes

## Specification

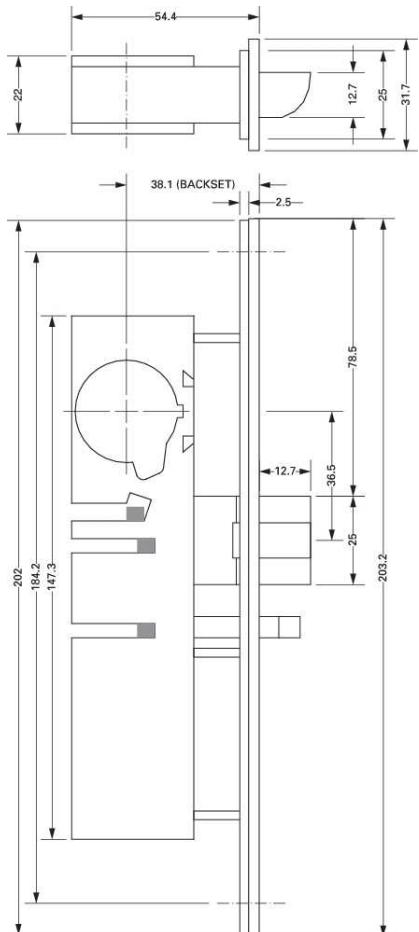

Overall Case Size:	202mm x 31.7mm x 54.4mm. Steel with corrosion-resistant plating.
Backset:	38.1mm (1 1/2").
Latch Bolt:	25.4mm x 12.7mm. ZA-27 Zinc, Chrome Plated, Hardened Steel Internal Pins, plus Anti-Pick baffle.
Latch Throw:	12.7mm.
Auxiliary Bolt:	ZA-27 Zinc, Chrome Plated with Hardened Steel Internal Pins.
Cylinder:	Any standard 29.4mm (1 5/32") Mortice Cylinder or Thumtturn with MS® cam.
Operation:	Turn key/thumtturn or handle to retract latch bolt.
Door Gap:	3 - 5mm.
Forend:	Steel, with aluminium faceplate..

## Ordering Information

24-4720-001-628	Faceplates - 4720ANSI Faceplate Flat SAA Finish
4720-401-5	Lock Bodies - 4720ANSI Deadlatch for Timber & Metal LH
4720-401-6	Lock Bodies - 4720ANSI Deadlatch for Timber & Metal RH

## Lock Mounting Accessories

9658-0514 RIVNUTS FOR RIVNUT FIX LOCKS