




PS5012 LM

展億科技有限公司  
BILLION BEST  
TECHNOLOGY  
LIMITED

12V DC  
5A POWER SUPPLY  
WITH CHARGER  
UNIT

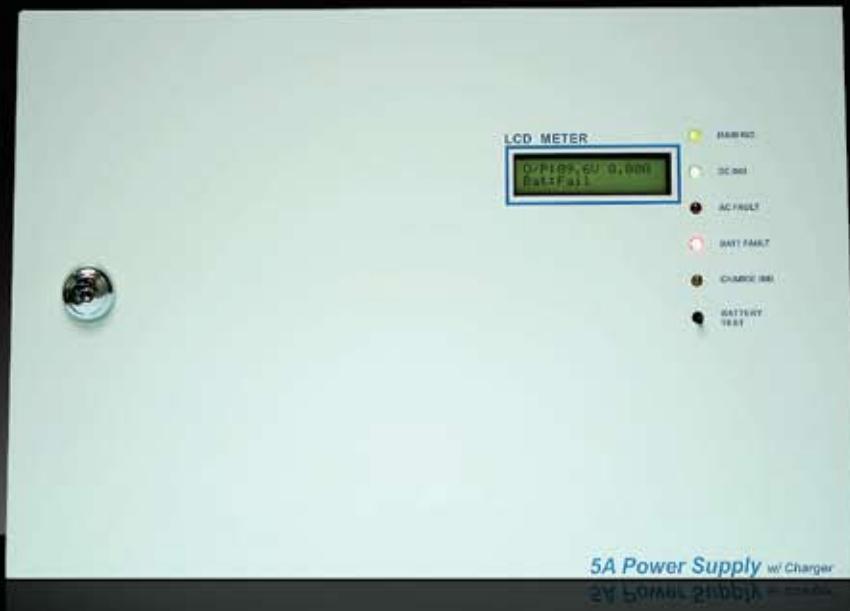

# PS 5012 LM

## 12V DC

## 5A POWER SUPPLY

## WITH CHARGER

## UNIT

WWW.BBTECH.COM.HK

AC INPUT:  
220V

FACE PANEL LCD DISPLAY:  
VOLTAGE:LOADING / CHARGE  
CURRENT:LOADING

PURPOSE:  
CCTV; SECURITY DEVICES

DC OUTPUT:  
DC12V - 13.7V

INDICATORS:  
MAIN POWER ON  
DC POWER ON  
AC FAULT  
BATTERY FAULT  
CHARGE INDICATOR  
BATTERY TEST

COLOUR:  
CREAM

PROTECTION:  
CURRENT LIMIT

DIMENSIONS:  
W 360 mm  
H 240 mm  
D 120 mm

BATTERY CHARGE:  
PULSE

# PS 5012 LM

## 12V DC

### 5A POWER SUPPLY WITH CHARGER UNIT

INPUT VOLTAGE	190 - 250Vac
INPUT FREQUENCY	47 - 63 HZ.
OPERATION MODE	110KHZ SWITCHING REGULATE MODE
OUTPUT VOLTAGE	12V~13.75V ±1% - DIP SWITCH SETTING
OUTPUT CURRENT	5A CONTINUES / 5.5A MAX. - CURRENT LIMITED
LINE REGULATION	< 0.2V
LOAD REGULATION	< 0.4V
HIGH FREQUENCY RIPPLE	< 300 MV
BATTERY CHARGE CUT OFFVOLTAGE	14V
BATTERY CHARGE CURRENT	1.5A CONSTANT CURRENT PULSE CHARGE
BATTERY DISCHARGE CUT OFFVOLTAGE	9V
OPERATING TEMPERATURE RANGE	0°C - +50°C

#### FEATURE

OVERLOAD PROTECTION	MICRO- CONTROLLER MONITORING
BATTERY REVERSE POLARITY PROTECT	LCD WITH BACKLIGHTING FOR BATTERY CHARGE AND AC STATUS DISPLAY
PULSE BATTERY CHARGER WITH CONSTANT CURRENT OPERATION	DIGITAL OUTPUT VOLTAGE, BATTERY VOLTAGE AND OUTPUT CURRENT METER
SEPARATED BATTERY CHARGER & POWER SUPPLY OUTPUT TO GUARANTEE OUTPUT AT 12V 5A MAX	MANUAL BATTERY DISCHARGE TEST BUTTON
BATTERY DISCHARGE CUT OFF AT 9V TO PREVENT OVER DISCHARGE	



展億科技有限公司  
**BILLION BEST  
TECHNOLOGY  
LIMITED**

電話 PHONE /

852.2710.8832

傳真 FAX /

852.2780.0033

電郵 EMAIL /

info@bbtech.com.hk

地址 ADDRESS /

九龍廣東道 559-561  
翠玉商業大樓八字樓

Room 801, 8/F,  
ade Commercial House,  
559-561 Canton Road,  
Kowloon, Hong Kong

WWW.BBTECH.COM.HK