


# S6000 Spectra™ Series - S6000-A/B

## Alarmed Exit

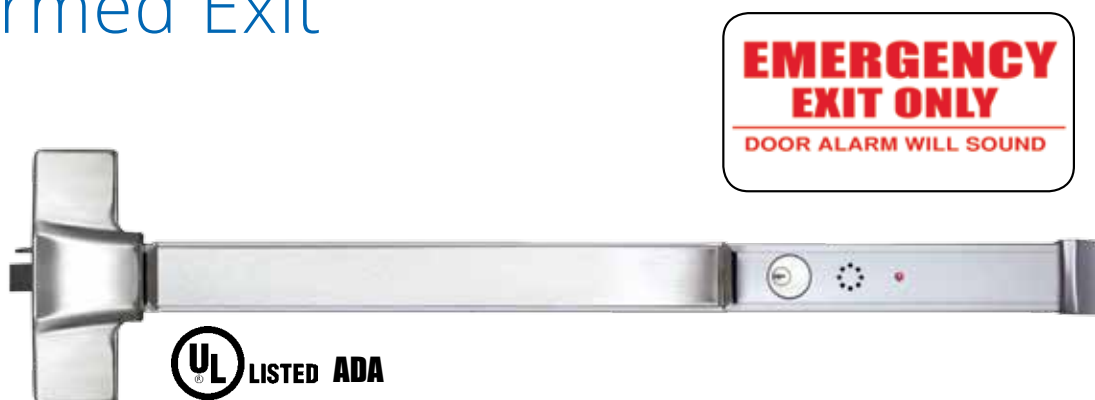

### ALARMED EXIT

Audible alarm and multi-colored LED provide alert to emergency egress. A field selectable alarm mode includes continuous alarm with manual key reset; or automatic rearm of alarm 2 min after door closes and may be retriggered. May be manually rearmed by key before automatically rearmed.



### FEATURES

- 100 dB Alarm; Visual and Audible On/Off Status:
  - Armed - Green LED Blinks Every 4 Seconds
  - Alarm Mode - Red LED, Bypass - No LED
- Remote Status Output
- Remote Inhibit (requires B option)

### MODELS

- A** Exit Alarm, 9V Battery Powered
- B** Exit Alarm, 12-24V AC/DC Input, 9V Battery Backup

### SPECIFICATIONS

|                     |                  |
|---------------------|------------------|
| <b>Arming Delay</b> | 15 or 60 Seconds |
|---------------------|------------------|

#### 2 Modes:

|              |                                                                                           |
|--------------|-------------------------------------------------------------------------------------------|
| <b>Modes</b> | <b>Continuous Alarm:</b> with Manual Key Reset                                            |
|              | <b>Automatic Re-Arm:</b> 2 Minutes After Door Closes or Manual Key Reset Before 2 Minutes |



## HOW TO ORDER:

### 1| SPECIFY MODEL

- S61** Rim Mount  
**S62** SVR Surface Vertical Rod  
**S63** Mortise (03 Lever trim included)  
 Specify: **EE/GE** Eclipse or Galaxy Escutcheon

### 2| SPECIFY FUNCTION

- 01** Exit Only  
**03** Nightlatch, Lever, Key Latch Retraction

### 3| SPECIFY PANIC OR FIRE RATED

- P** Panic Exit Device  
**F** Fire Exit Device

### 4| SPECIFY HAND (FOR S63 ONLY)

- RR** Right Hand Reverse Bevel, RHRB  
**LR** Left Hand Reverse Bevel, LHRB

### 5| SPECIFY FINISH

- U** 630 Dull Stainless Steel

### 6| SPECIFY LENGTH

- 36** For 36" Door  
**42** For 42" Door  
**48** For 48" Door

### 7| SPECIFY EXIT ALARM

- A** Exit Alarm, 9V Battery Powered  
**B** Exit Alarm with 12/24V AC/DC Input  
 (9V Battery provides power backup)

Options:

- AR6** 6 or 10 Minute Alarm with Auto Rearm and Manual Key Reset  
**AD1** 1 Second Arming Delay  
**AR20** 20 Minute Alarm with Auto Rearm and Manual Key Reset

### 8| SPECIFY TRIM

**FOR MORTISE S63 ONLY**

- EE** Eclipse Escutcheon  
**GE** Galaxy Escutcheon

### 8| SPECIFY TRIM (OPTIONAL) RIM, SURFACE ONLY

Mechanical Trim (less cylinder)


- EK02U** Dummy Eclipse Escutcheon  
**GK02U** Dummy Galaxy Escutcheon  
**EK03U** Eclipse Escutcheon  
**GK03U** Galaxy Escutcheon

Electric Trim

- Failsecure, field reversible to failsafe
- 4 ft cable
- 600/300 mA @12/24VDC

**EKE03U** Eclipse style electric trim less mortise cylinder, Stainless Steel Finish

**GKE03U** Galaxy style electric trim less mortise cylinder, Stainless Steel Finish

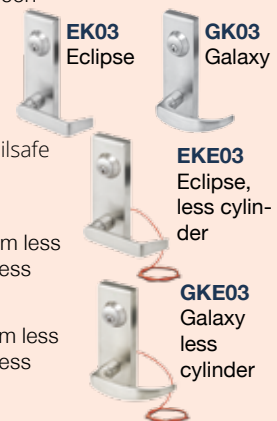


### SPECIFY TRIM OPTIONS:

Rim Cylinder Required for 03 function, Mortise Cylinder Required for S6300

- CYL-6KDQ** 6 pin, 1.125" Mortise Cylinder, Keyed Different, Dull Chrome  
**CYL-6KAQ** 6 pin, 1.125" Mortise Cylinder, Keyed Alike, Dull Chrome  
**RIM-CYL-KA** 6-pin Rim Cylinder, Keyed Alike, Specifically For EK03, GK03

## ACCESSORIES

- PTH-4Q** Four Wire, Dull Chrome  
**PTH-10Q** Ten Wire, Dull Chrome

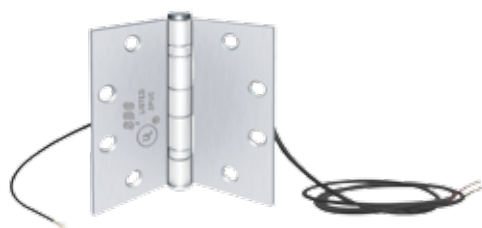

- PTM-2AL** Aluminum Powder Coat, US28 equivalent  
**PTM-2BZ** Dark Brown Powder Coat, US10B equivalent

