

ELECTRIC BOLTS - ML201 SERIES




MLR201SLD



ML201SLD

- ML201 : 200L*34W*43H

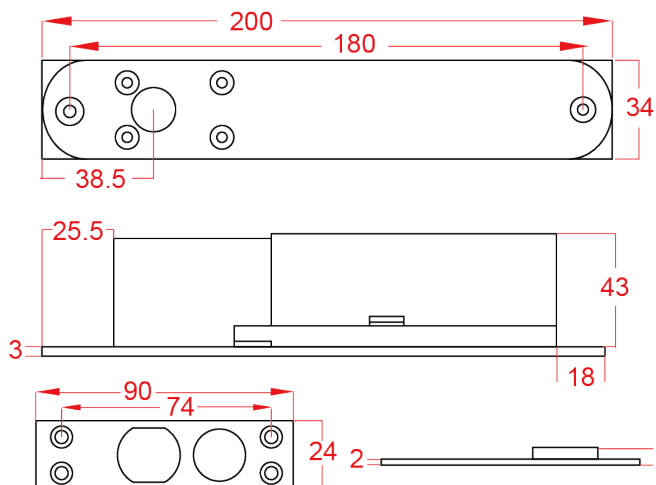

▼ ORDERING INFORMATION

ML(R)201 S L D (-L)

Round plate Door status sensor Lock status sensor Long plate : 210mm

EXAMPLE:

- ML201SLD : With Lock status sensor , Door status sensor
- MLR201SLD : Round plate, With Lock status sensor , Door status sensor

▼ SPECIFICATION

- Intelligent Auto-Relock
- Request to EXIT : The lock has 2 wires for remote release
- Suitable for double swing door
- Fail-safe : Locked when energized
- With Door status sensor, Lock status sensor
- Built-in voltage spike suppressor
- Intelligent Auto-Relock
- Request to Exit
- Face plate : Aluminum
- Cover plate : Stainless steel
- Weight : 0.9KG
- Use jumper to select auto-lock time delay (0 , 2.5 , 5 secs)
- Voltage : 12VDC or 24VDC
- Current : Star : 0.9A / 12VDC , 0.5A/24VDC
Standby : 0.2A / 12VDC , 0.1A/24VDC

▼ INSTALLATION

- Suitable for glass door or surface mount installation



▼ BRACKETS INSTALLATION



UG202

UG200



U-200 / UG201