


展億科技有限公司
BILLION BEST
TECHNOLOGY
LIMITED

PS5012 AVM

12V DC
5A POWER SUPPLY
WITH CHARGER
UNIT

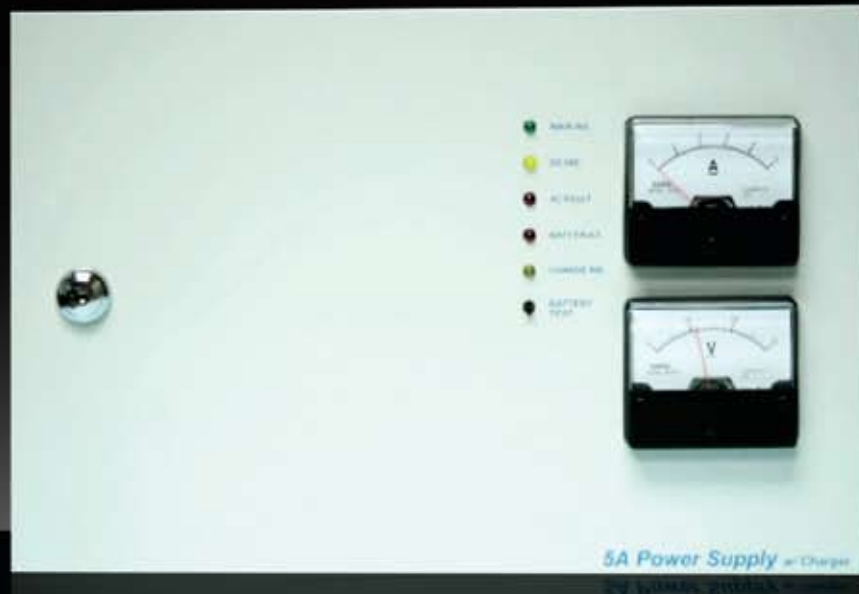

PS 5012 AVM

12V DC 5A POWER SUPPLY WITH CHARGER UNIT

WWW.BBTECH.COM.HK

AC INPUT:
220V

DC OUTPUT:
DC12V - 13.7V

PROTECTION:
CURRENT LIMIT

BATTERY CHARGE:
PULSE

FACE PANEL DISPLAY:
VOLTAGE METER
AMP. METER

INDICATORS:
MAIN POWER ON
DC POWER ON
AC FAULT
BATTERY FAULT
CHARGE INDICATOR
BATTERY TEST

PURPOSE:
CCTV; SECURITY DEVICES

COLOUR:
CREAM

DIMENSIONS:
W 360 mm
H 240 mm
D 120 mm

PS 5012 AVM

12V DC

5A POWER SUPPLY

WITH CHARGER

UNIT

INPUT VOLTAGE	190 - 250Vac
INPUT FREQUENCY	47 - 63 HZ.
OPERATION MODE	110KHZ SWITCHING REGULATE MODE
OUTPUT VOLTAGE	12V~13.75V ±1% - DIP SWITCH SETTING
OUTPUT CURRENT	5A CONTINUES / 5.5A MAX. - CURRENT LIMITED
LINE REGULATION	< 0.2V
LOAD REGULATION	< 0.4V
HIGH FREQUENCY RIPPLE	< 300 MV
BATTERY CHARGE CUT OFF VOLTAGE	14V
BATTERY CHARGE CURRENT	1.5A CONSTANT CURRENT PULSE CHARGE
BATTERY DISCHARGE CUT OFF VOLTAGE	9V
OPERATING TEMPERATURE RANGE	0°C - +50°C

FEATURE

OVERLOAD PROTECTION

BATTERY REVERSE POLARITY PROTECT

PULSE BATTERY CHARGER WITH CONSTANT
CURRENT OPERATION

SEPARATED BATTERY CHARGER &
POWER SUPPLY OUTPUT TO GUARANTEE
OUTPUT AT 12V 5A MAX

BATTERY DISCHARGE CUT OFF AT 9V TO
PREVENT OVER DISCHARGE

MICRO- CONTROLLER MONITORING



展億科技有限公司
BILLION BEST
TECHNOLOGY
LIMITED

電話 PHONE /
852. 2710. 8832

傳真 FAX /
852. 2780. 0033

電郵 EMAIL /
info@bbtech.com.hk

地址 ADDRESS /

九龍廣東道 559-561
翠玉商業大樓八字樓

Room 801, 8/F,
ade Commercial House,
559-561 Canton Road,
Kowloon, Hong Kong

WWW.BBTECH.COM.HK