



ELECTRIC BOLTS - ML250P SERIES SMART FAIL-SECURE

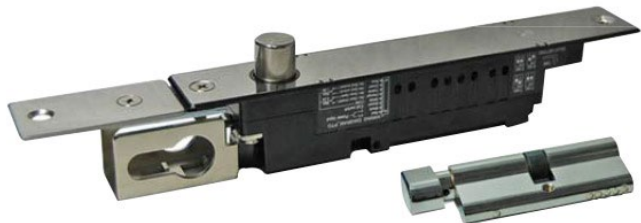

- Faceplate : 193L*25.4W*2T mm
- Lock Body : 150L*25.4W*33H mm
- Strike plate : 102.55L*25.4W*2~2.5Tmm

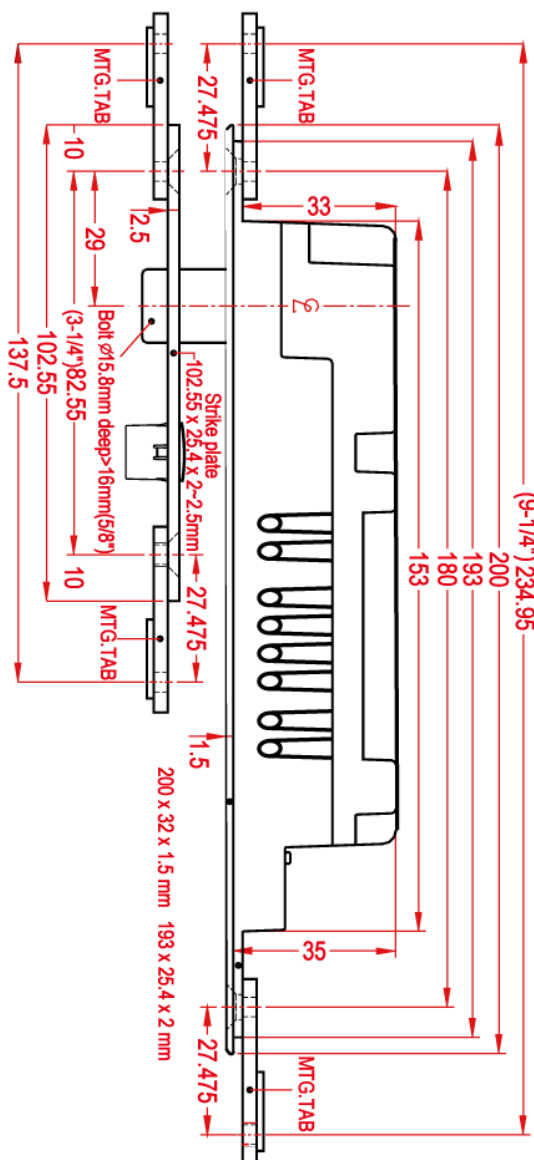

▼ ORDERING INFORMATION

ML250P **L** **D** **X** - **C**

└─ Lock cylinder

└─ F : Fail safe

└─ NO : Fail secure

└─ Door status sensor

└─ Lock status sensor

└─ Fail secure

EXAMPLE :

- ML250PL : Smart , Fail secure , With Lock status sensor , bi-color LED
- ML250PLD : Smart , Fail secure , With Lock status sensor , Door status sensor ,bi-color LED
- ML250PLD-C : Smart , Fail secure , bi-color LED , With Lock status sensor , Door status sensor , Lock cylinder

▼ SPECIFICATION

- Suitable for double swing door
- Fail secure
- Built-in bi-color LED , Time delay
- Lock Body Temperature : $<40^{\circ}\text{C}$
(under room temperature 25°C)
- Bolt length : 16mm (5/8")
- Bolt dia : 15.8mm (5/8")
- Voltage: 12VDC / 24VDC (Selectable)
- Current Draw:
Star : 1.2A/12VDC : 0.68A/24VDC
Standby : 0.2mA/12VDC
0.15mA/24VDC
- Dss Relay : COM , NO , NC (MAX.3W ; 30VDC ; 0.2A)
- Lss Relay : COM , NO , NC (MAX ; 30VDC ; 1A)

▼ TIME DELAY

Open Delay 0sec. 3sec. 6 sec. 9 sec.

Close Delay 0 sec. 3 sec. 6 sec. 9 sec.