






Horizontal faceplate adjustment compensates for misalignment

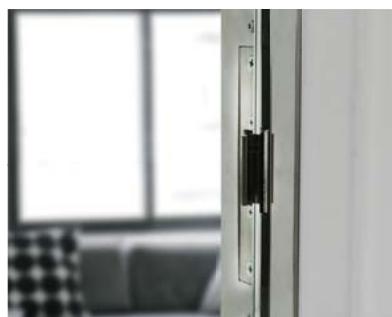

Dimensions

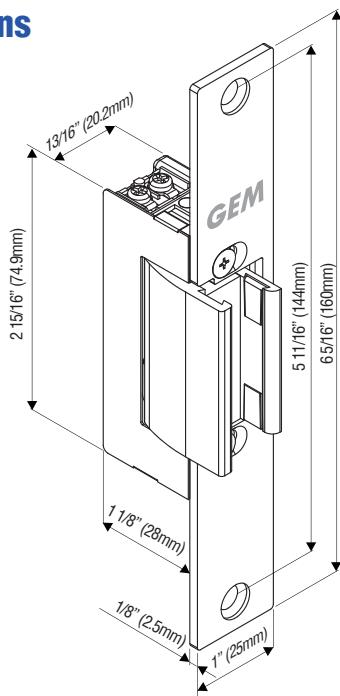

A minimum of 1/16"(2 mm) gap exists between the glass door and strike faceplate.

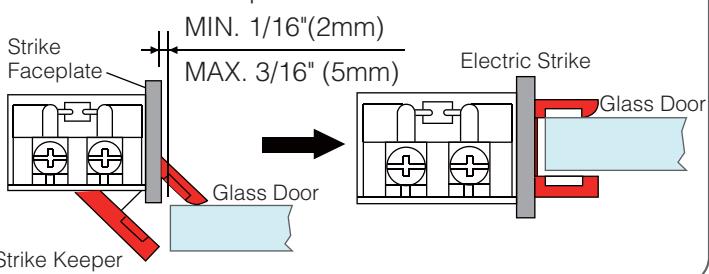

Electric Strikes

GK1480 Series

Durable Strikes for Glass Door Application

The 1480 series electric strike is designed for use on glass doors. It is reversible for right or left handed doors and can be installed at the top and side of the door.

Standard Features

- Easy installation
- 12 or 24 VDC
- Non-handed
- Includes black shims for 10mm thick glass door application
- Zinc alloy construction
- Horizontal faceplate adjustment compensates for misalignment
- For 10 mm or 12mm thick glass doors
- Brushed stainless steel (US32D) finish

Models

Part Number	Description
GK1480	Glass door strike, Fail-safe
GK1481	Glass door strike, Fail-secure

Installation Applications

