



ELECTRIC STRIKES - Dual Mode Monitoring ST124 SERIES

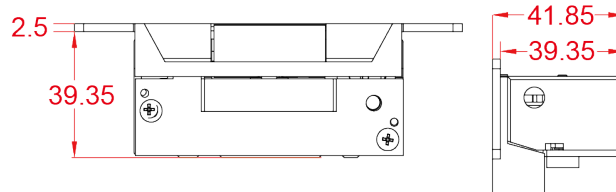


ST124SLD

- ST124SLD : 123.5L*31.4W*40.85H mm

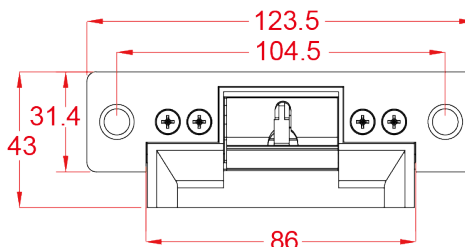

ELECTRIC STRIKES



▼ ORDERING INFORMATION

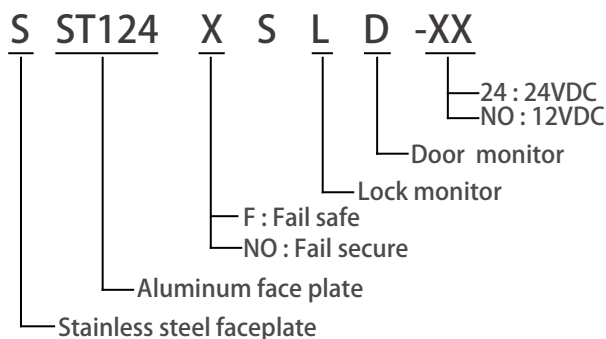


EXAMPLE :

- ST124SL : Aluminum faceplate fail secure W/lock monitor 12VDC
- SST124SLD : Stainless steel faceplate fail secure W/door, lock monitor 12VDC
- ST124FSL : Aluminum faceplate fail safe W/lock monitor 12VDC
- SST124FSLD-24 : Stainless steel faceplate fail safe W/door, lock monitor 24VDC

- SST124SLD : 165L*31W*40.2H mm

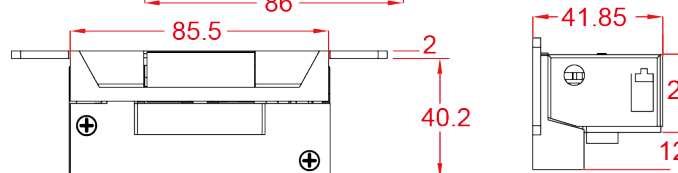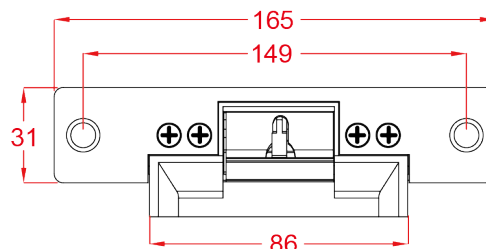

▼ APPLICATION

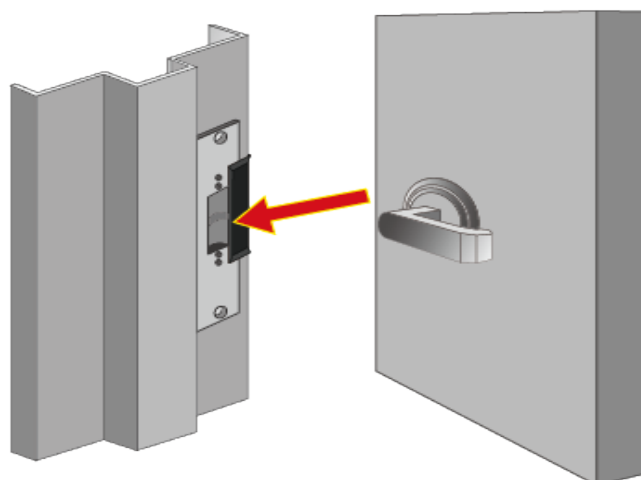

▼ SPECIFICATION

- Aluminum Face plate : 123.5L*31.4W*2.5T mm
- Stainless Steel Face plate : 165L*31W*2T mm
- Door Latch : 1/2" (12.7mm)
Keeper Depth : 12.7 mm
- 12VDC / 260mA
- 24VDC / 150mA (Specify on order)

▼ SPECIAL FEATURE

- Site convertible from one mode to the other (Fail secure default, unless specified on order)