

DOOR HOLDER - wall mounted DH503 / DH503B SERIES

DOOR
HOLDER



DH503



DH503B



S-AP702
60L*60W*
55.5H mm
(default)



S-AP702E
outer dia: $\phi 92$ mm
inner dia: $\phi 63.3$ mm*
24~28.7Hmm




S-AP702F
60L*60W*24H mm




S-AP702G
60L*60W*
93.6~102.6H mm
(height adjustable)


- DH503 : 80L*80W*97H mm

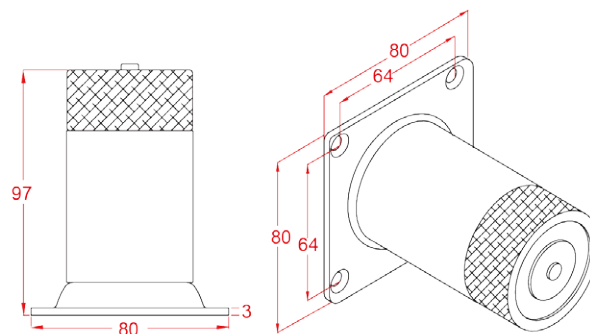

- DH503B : 80L*80W*97H mm

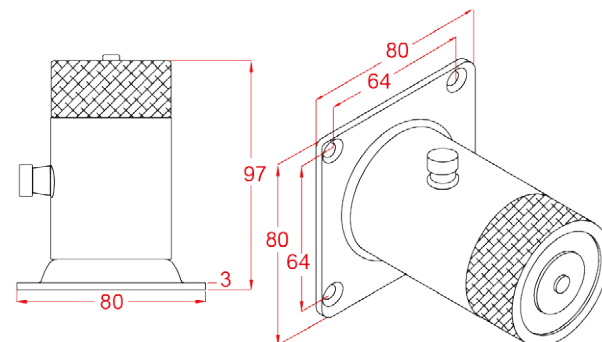

▼ ORDERING INFORMATION

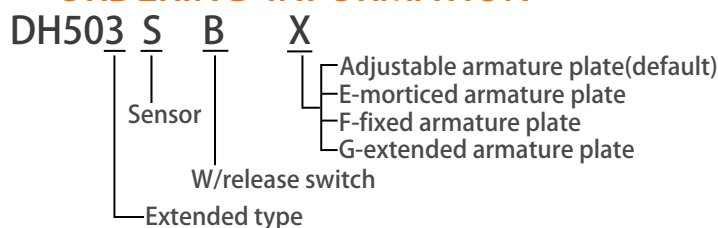

EXAMPLE :

- DH503 : Wall mounted, w/adjustable armature plate, extended type
- DH503S : Wall mounted, w/adjustable armature plate, extended type, monitored
- DH503F : Wall mounted, w/fixed armature plate, extended type
- DH503B : Wall mounted, w/adjustable armature plate, extended type, w/release switch


▼ SPECIFICATION

- Holding Force : about 100LBS
- Built-in voltage spike suppressor
- Sensor : optional
- Voltage : 12 / 24VDC (Selectable)
- Current Draw : 100mA / 12VDC ,50mA / 24 VDC


▼ FEATURES

- Suitable for fire escape doors in large-scale buildings.
- It releases the armature plate to allow the door closer to close the door when a fire alarm or emergency is detected, to keep smoke in a limited area.
- With Release Switch : to release the door for other purposes (e.g. function test) (DH 503B only)
- Adjustable, fixed, extended, or morticed armature plate

▼ ARMATURE PLATE INSTALLATION

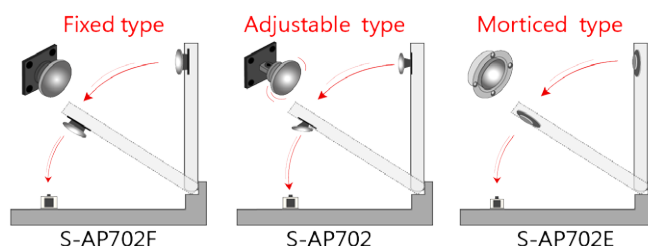

▼ APPLICATION

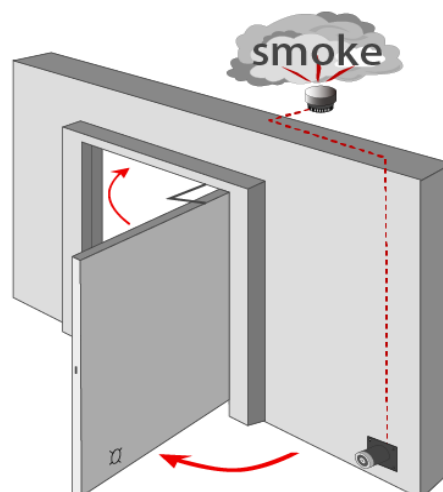

DH503 / DH503B Wall mounted
W/Release switch (DH503B only)