



MAGNETIC LOCKS - Surface Mounted MLSH SERIES 600P



- Magnet (MLSH01) : 250L*47.2W*26.5D mm
- Armature Plate : 185L*38W*12.5T mm

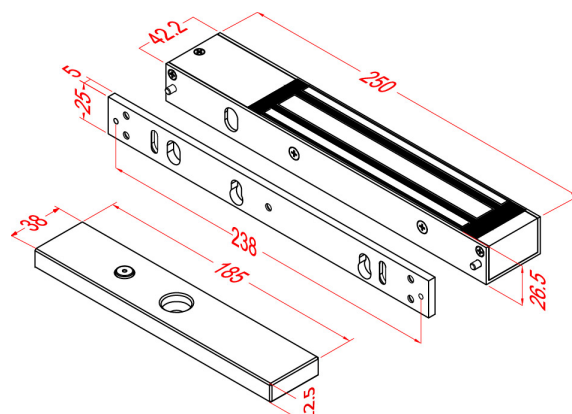


▼ ORDERING INFORMATION

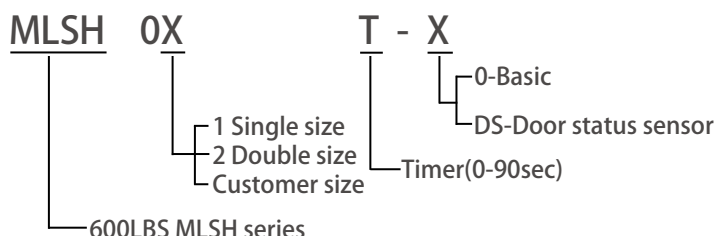

EXAMPLE :

- MLSH01-0 : Maglock 600P Basic
- MLSH01 : Maglock 600P, W/Lock status sensor
- MLSH02 : Maglock 600P*2 W/Lock status sensor, Timer
- MLSH01T-DS : Maglock 600P W/Lock status sensor, Door status and Timer

- Magnet (MLSH02) : 500L*47.2W*26.5D mm

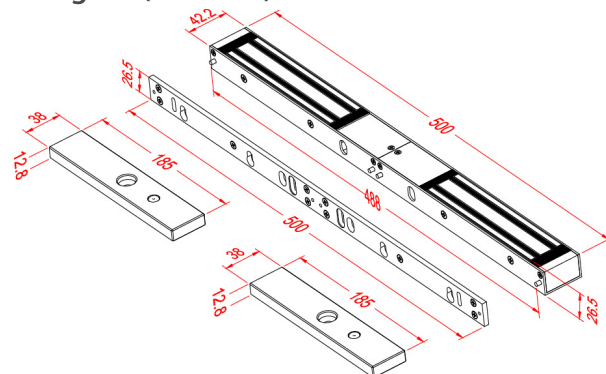

▼ BRACKET INSTALLATION



B1003 - L Bracket

B1011 - Adjustable L Bracket



B1012A - L&Z Bracket



U-185A Bracket



Double Size



B1004 / B1005



B0011A . B0012 Armature Plate Housing

▼ SPECIFICATION

- Voltage : 12V/24VDC (Selectable)
- Current Draw : 500mA/12V , 250mA /24V
- Holding Force : about 600LBS
- Built-in voltage spike suppressor ,
- With Bi-color LED
- Adjustable mounting plate for easy and appropriate installation
- Special Finish : Zinc (on the magnet & armature plate)
- Anodized Aluminum housing
- The length can be added according to customer's requests