


展億科技有限公司
BILLION BEST
TECHNOLOGY
LIMITED

EL 2512

12V DC
CHARGER
WITH ENTRY
DELAY

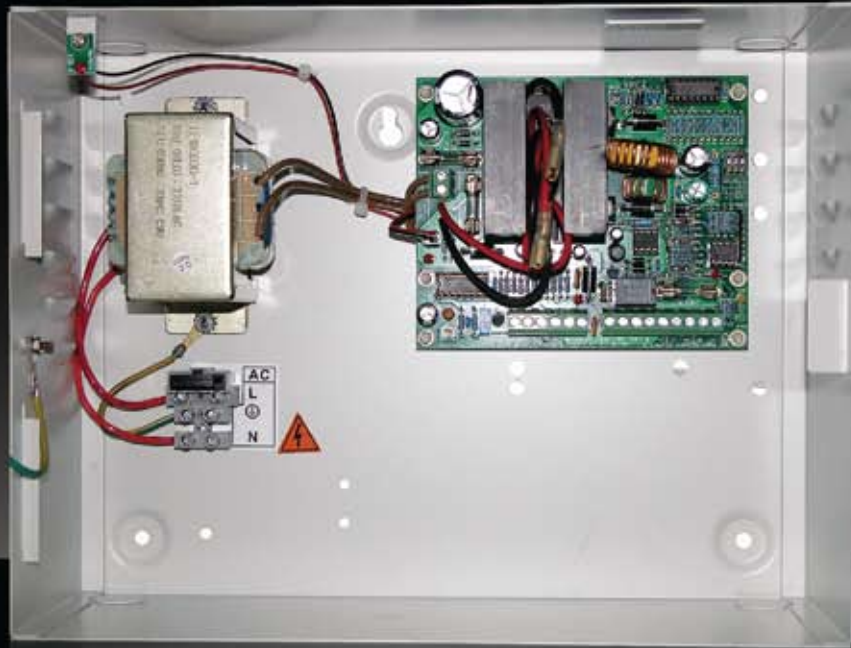

EL 2512 12V DC CHARGER WITH ENTRY DELAY

WWW.BBTECH.COM.HK

POWER SOURCE:
220V AC

ADJUSTABLE OUTPUT
VOLTAGE:
12/13.7V AC - DIP SWITCH

POWER INDICATOR:
WATER CLEAR LENS

FUSE PROTECTION:
INPUT & OUTPUT

BATTERY CHARGE:
REVERSE POLARITY
PROTECT

PROTECTION:
CURRENT LIMIT /
OVER-VOLTAGE
PROTECTION

AC FAULT SIGNAL:
DRY CONTACT -
COM., N.C., N.O.

MODE OF LOCK
OPERATION:
FAIL SAFE / FAIL SECURE -
DIP SWITCH

ENTRY DELAY:
1-20 SECONDS

PURPOSE:
ACCESS CONTROL
DEVICE

COLOUR:
BEIGE


DIMENSIONS:
W 290 mm
H 220 mm
D 100 mm

EL 2512

12V DC CHARGER WITH ENTRY DELAY



INPUT VOLTAGE	190 - 250Vac
INPUT FREQUENCY	47 - 63 HZ.
OPERATION MODE	CONTINUOUS LINER REGULATE MODE
OUTPUT VOLTAGE	12V / 13.75V $\pm$ 1% - DIP SWITCH SETTING: 0.25V/STEP
OUTPUT CURRENT	2.5A CONTINUES / 2.8A MAX. - CURRENT LIMIT
LINE REGULATION	< 0.15V
LOAD REGULATION	< 0.3 V
BATTERY CHARGE CUT OFF VOLTAGE	14V
MAX. BATTERY CHARGE VOLTAGE	14.5V
OUTPUT OVER VOLTAGE PROTECTION TRIGGER VALUE	1.3 x OUTPUT VALUE
BATTERY CHARGE CURRENT	600mA CONSTANT CURRENT
ENTRY DELAY	1 - 20 SEC.
MODE OF LOCK OPERATION	FAIL SAFE & FAIL SECURITY - DIP SWITCH SETTING
CONFIGURABLE	ENERGIZE / DE-ENERGIZE TO ACTIVE
OPERATING TEMPERATURE RANGE	0°C - +50°C

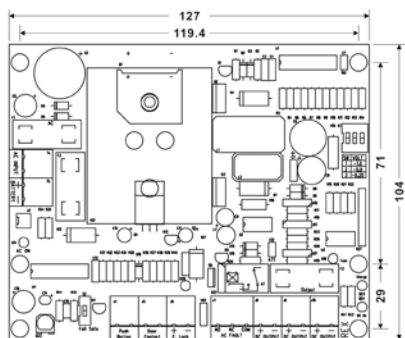

FEATURE

OVERLOAD PROTECTION

BATTERY REVERSE POLARITY PROTECT

PULSE BATTERY CHARGER WITH CONSTANT
CURRENT OPERATION

SEPARATED BATTERY CHARGER & POWER SUPPLY
OUTPUT TO GUARANTEE OUTPUT AT 12V 2.5A MAX

AC FAULT RELAY OUTPUT

OUTPUT OVER VOLTAGE PROTECTION



展億科技有限公司
BILLION BEST
TECHNOLOGY
LIMITED

電話 PHONE /
852. 2710. 8832

傳真 FAX /
852. 2780. 0033

電郵 EMAIL /
info@bbtech.com.hk

地址 ADDRESS /

九龍廣東道 559-561
翠玉商業大樓八字樓

Room 801, 8/F,
ade Commercial House,
559-561 Canton Road,
Kowloon, Hong Kong

WWW.BBTECH.COM.HK