


ELECTRIC STRIKES - ST125 SERIES




ST125

SST125

- ST125 : 124L*32W*38H mm

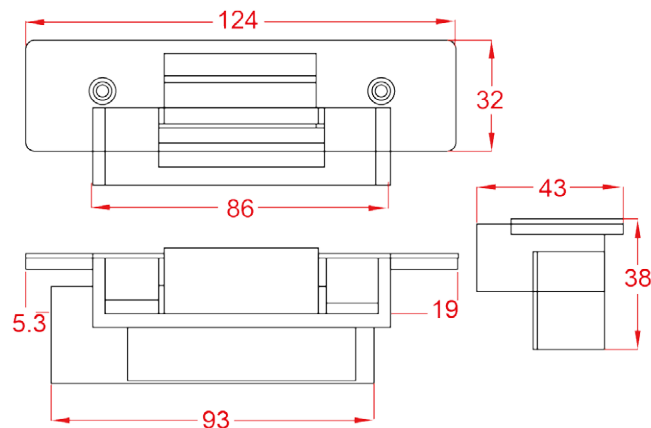


▼ ORDERING INFORMATION

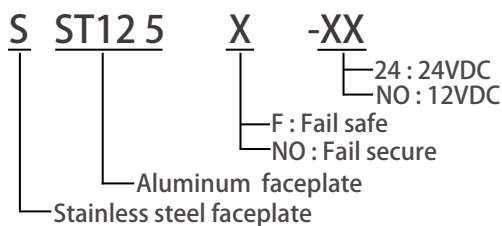


EXAMPLE :

- ST125 : Aluminum faceplate fail secure 12VDC
- SST125 : Stainless steel faceplate fail secure 12VDC
- ST125F : Aluminum faceplate fail safe 12VDC
- SST25F-24 : Stainless steel faceplate fail safe 24VDC

- SST125 : 165L*32W*38H mm

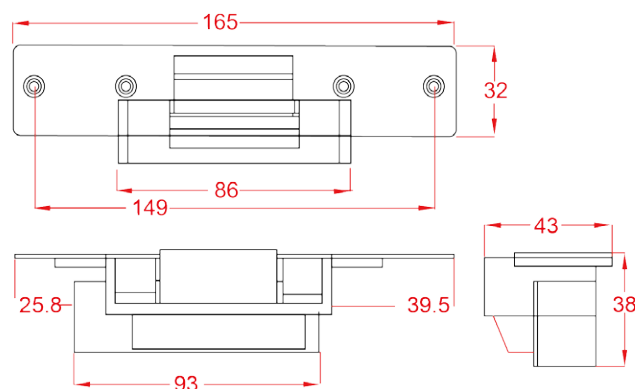

▼ APPLICATION

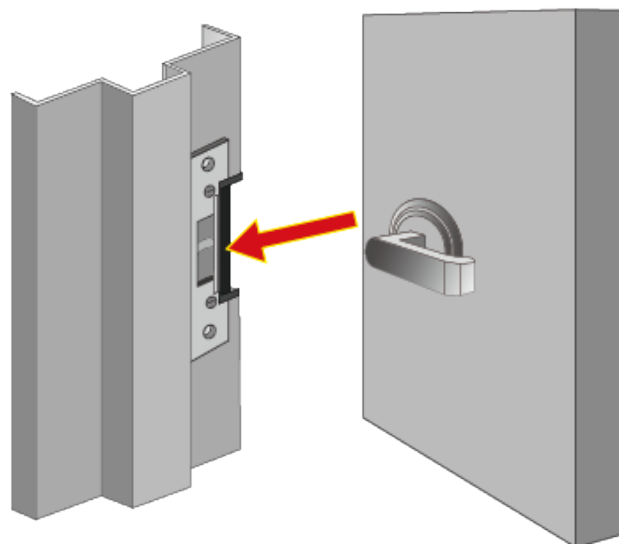

▼ SPECIFICATION

- Aluminum : 124L*32W*1.5T mm
- Stainless Steel : 165L*32W*1.5T
- Door latch : 5/8"(15.8mm)
- Keeper Depth : 16 mm
- Fail secure : 12VDC/400mA
- Fail secure : 24VDC/200mA(Specify on order)
- Fail safe : 12VDC/200mA
- Fail safe : 24VDC/100mA(Specify on order)