



ELECTRIC STRIKES - ST160 J SERIES

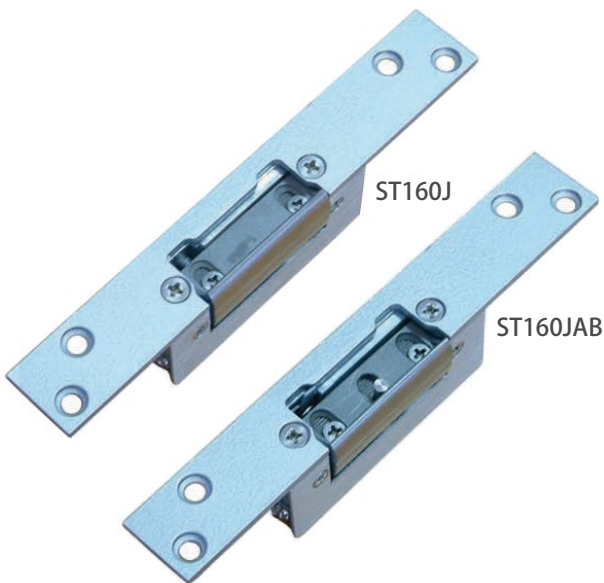


- ST160J / SST160J : 160L*25W*31H mm

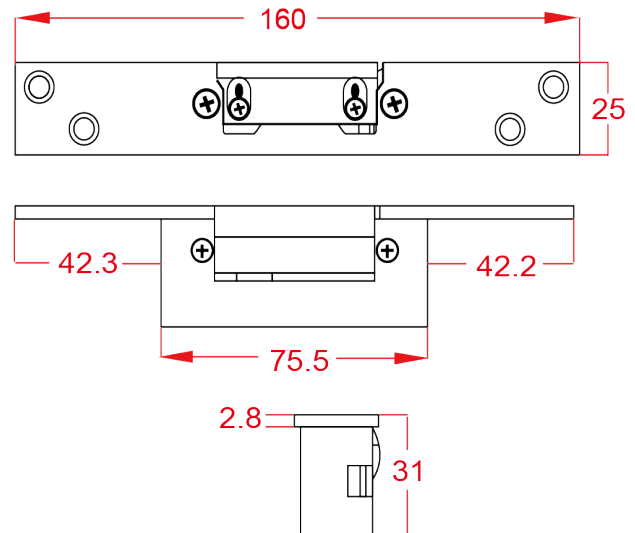

ELECTRIC STRIKES

▼ ORDERING INFORMATION

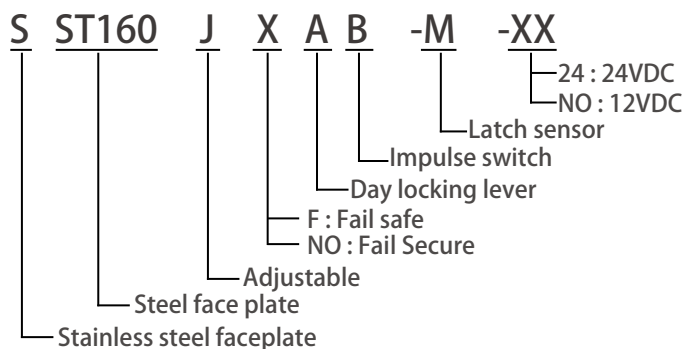

EXAMPLE :

- ST160J : Steel faceplate Adjustable Symmetrical strike fail secure 12VDC
- SST160JA : Stainless steel face plate Adjustable Symmetrical strike, Day locking lever, fail secure 12VDC
- ST160JAB-24 : Steel faceplate Adjustable Symmetrical strike, Day locking lever Impulse switch, fail secure, 24VDC
- Fail safe type : ST160JF / SST160JF only.

▼ SPECIFICATION

- Keeper Depth : 6 mm
- Door Latch : 9 mm
- Steel faceplate : 160L*25W*2.8T mm
- Stainless steel faceplate : 160L*25W*2.8T mm
- Fail secure : 12VDC / 600mA
- Fail secure : 24VDC / 300mA (Specify on order)
- Fail safe : 12VDC / 280mA
- Fail safe : 24VDC / 140mA (Specify on order)

▼ FAIL SAFE / FAIL SECURE

- Site convertible from one mode to the other (Fail secure default, unless specified on order)

▼ APPLICATION

