

Patent No.:  
M328067 (Taiwan)  
ZL 2007 2 0175576.7 (China)

## Statement

The CP-24 series Break Glass call points, with quadruple pole, change contacts from N/C to N/O. The main function is to override the electrical locking/release devices in case of emergency. A key is used to replace glass. L types have backlight.


## Specification

Dimensions: 87x87x55 mm

Contact resistance:  $50\text{m}\Omega$


Switch rating: 1A/ 125VAC

Current draw (Backlight):25mA / 12VDC; 45mA / 24VDC


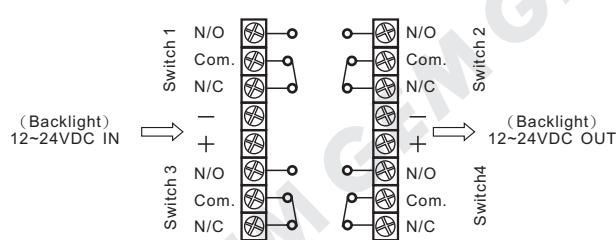


## Dimensions

(European Size)

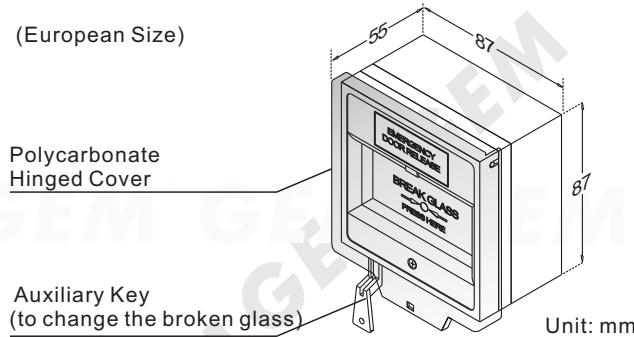

## Application

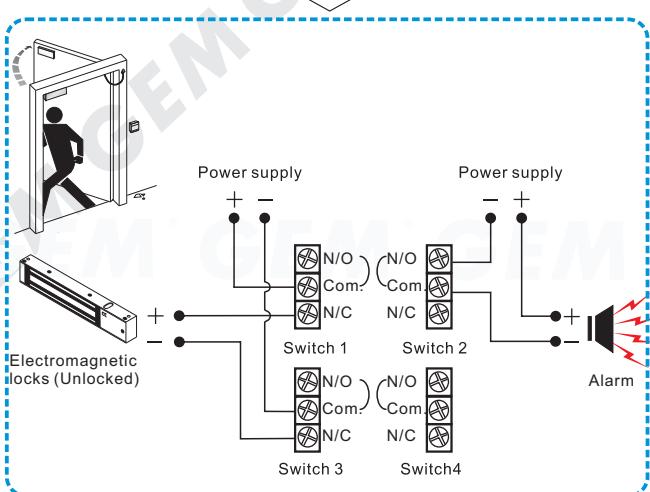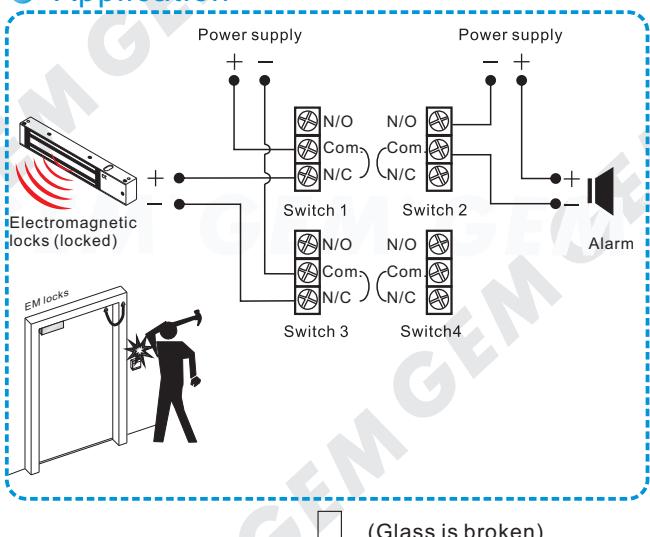

## Warranty

The product is warranted against defects in material and workmanship while used in normal service for a period of 1 year from the date of sale to the original client. The GEM policy is one of continual development and improvement; therefore GEM reserves the right to change specifications without notice.

GIANNI INDUSTRIES, INC.

Copyright © Gianni Industries, Inc. All rights reserved.  
DM-CA-CP-24 Ver. E Published on 2011.03.22

No.13, Zhongxing Rd., Tucheng Dist.,  
New Taipei City 23678, Taiwan (R.O.C.)  
Tel: +886-2-2267-7986 / Fax: +886-2-2267-9876  
E-mail: inquiry1@gianni.com.tw  
Website: [www.gianni.com.tw](http://www.gianni.com.tw)