



## 62 SERIES

## 63 SERIES (Top Rod Only)

### Concealed Vertical Rod Device - Narrow Stile Hollow Metal Door


The 62 and 63 Series **concealed vertical rod exit device** is super-heavy-duty panic and fire exit hardware for use on all types of narrow stile hollow metal doors without a mullion. The patented mounting plate system ensures the easiest and most accurate installation of panic hardware available.

Note: For Top Rod Only -  
Specify 63 Series



62 Series Shown -  
(Top and Bottom Bolt)

ANSI 156.3 - 2008  
Grade 1  
Type 6

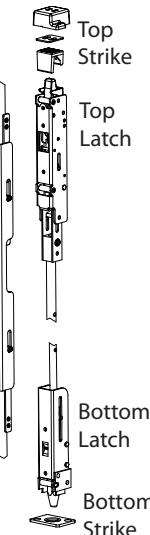

#### Benefits -

- Tough and durable design for years of trouble-free service in high-use, high-abuse environments
- Minimal door prep saves time and money
- Aesthetically pleasing options to meet various applications including:  
60/61 CVR Narrow Stile Alum. Door  
62/63 CVR Narrow Stile H.M. Door  
70/71 CVR Wide Stile Wood Door  
80/81 CVR Wide Stile H.M. Door  
82/83 CVR Wide Stile Alum. Door
- Fast and accurate installation
- Except for 03R, outside trims are easily changed or rekeyed without removing device from door

#### Features -

- 6-position multi-step action in top latch keeps top and bottom bolts retracted until door closes and provides more consistent re-latching and security to door
- Top strike fully adjustable both vertically and to accommodate a variety of varying weather strip thicknesses
- Top strike both secures the door and re-engages the latchbolts
- Patented deadlocking of top (62 and 63 Series) and bottom bolt (62 Series) assemblies
- Durable steel bottom drop bolt (62 Series)
- Rods are easily adjustable with rods installed in door
- Angled end-cap deflects damage away from device
- Handed - field reversible
- Field sizeable
- 1/8 turn dogging

#### Mechanical Options -

- F - 3 Hour without astragal up to 10 foot (steel) door
- HD - Hex Dogging (Std.)
- CD - Cylinder Dogging
- SLR - Silencer
- 30 - Fits 30" Door Width - limited electrical options
- 36 - Fits 36" Door Widths (Std.)
- 48 - Fits 48" Door Widths
- EC1 - Ramped Endcap - Heavy duty (standard on 630, 606, 612, 613, 605, 611 & 629 finishes only)
- EC2 - Flush Endcap (standard on 628, 693 & 695 Finishes only)

#### Electrical Options -

- Exit Alarm (EA)
- Electric Dogging (ED)
- Electric Latch Retraction (ER)
- Delayed Egress Self-Contained (EE)
- Request to Exit (EX)
- Request to Exit for High Voltage (EXV)
- Electric Delayed Egress x Latch Retraction (EExER)

Refer to Electrified Options section for more information

## Accessories -

- SSK - Security Torx Screw Kit


## Technical Information -

- Door Types - Hollow Metal
- Door Stile - Fits minimum 4-1/2"
- Door Thickness - Fits standard 1-3/4" - 2 1/4" (for other door thicknesses contact factory)
- Fasteners - Machine and sheet metal screws supplied standard
- Rail is heavy ribbed aluminum extrusion

## Finishes -


605 / US3	Polished Brass	628 / US28	Satin Aluminum	693 / SPBLK	Black, painted
606 / US4	Brushed Brass	629 / US32	Polished Stainless Steel	695 / SP313	Dark Bronze, painted
611 / US9	Polished Bronze	630 / US32D	Brushed Stainless Steel		
612 / US10	Brushed Bronze				
613 / US10B	Oil Rubbed Bronze				

## Top Latch Installation - for 62 & 63 Series

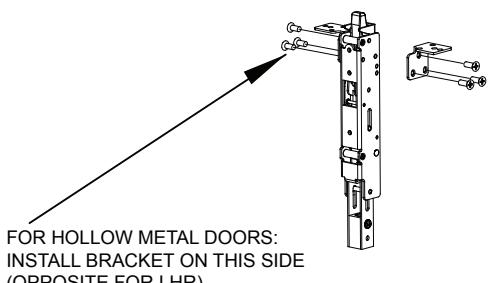

FOR HOLLOW METAL DOORS:  
INSTALL BRACKET ON THIS SIDE  
(OPPOSITE FOR LHR)


FOR FIRE RATED HOLLOW METAL DOORS:  
INSTALL BRACKETS ON BOTH SIDES



HOLLOW METAL DOOR ATTACHMENT - TOP

## Bottom Latch Installation - for 62 Series Only

Note: Bottom bracket may slide up on rod during assembly. It may be necessary to pull it towards bottom edge of door with a simple wire hook.

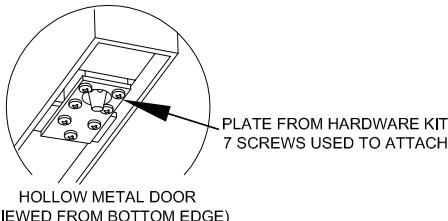

HOLLOW METAL DOOR  
(VIEWED FROM BOTTOM EDGE)

## Listings and Approvals -



UL Listed  
Panic Hardware

LISTED



UL Listed Fire Exit Hardware  
for 3 hours, maximum (with steel door)  
8'x10' pairs of doors

LISTED



Meets ADA requirements



UBC 97, Standard 7-2 and  
UL10C for positive pressure



ANSI/BHMA certified A156.3



Meets NFPA 80 & 101  
for Life Safety

## Detex Limited Warranty -

10 Year Mechanical/3 year Electrical  
Limited Manufacturer's Warranty



Life Safety and Security Door Hardware

Detex Corporation  
302 Detex Drive

New Braunfels, Texas 78130-3045 USA

PH. (830) 629-2900

(800) 729-3839

FAX (830) 620-6711

(800) 653-3839

<http://www.detex.com>

USA Sales:

[marketing@detex.com](mailto:marketing@detex.com)

International Sales:

[export@detex.com](mailto:export@detex.com)