


# 480 Series

## Wireless Push Plate Switch Kit

Designed to control automatic door or electrified locking hardware with wireless Push Plate Switch access. Each Kit contains two 4-1/2" Push Plate Switches (round or square, 480 series,) two matching surface mount back boxes (round or square, 480 series,) two wireless transmitters (400W1-433, 9V Batteries included) and one wireless nano receiver (400RC433).

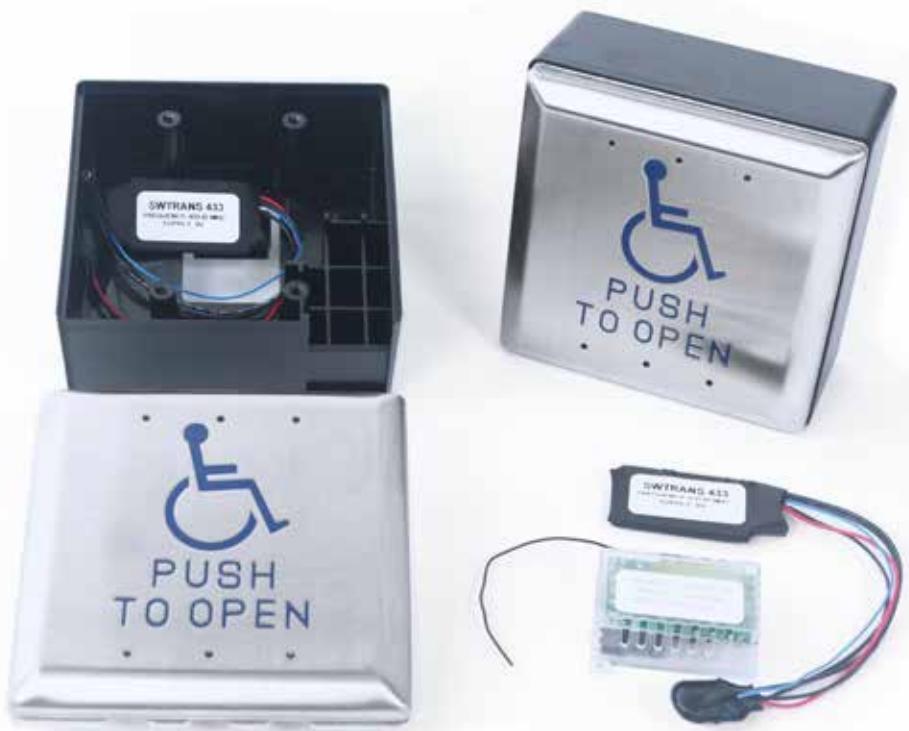

### FEATURES

- Pressing Any Part of the Push Plates 4 1/2" Active Area Causes Switch Actuation
- Surface Box Mount
- Transmitter: Pre-Wired for Quick Installation
- Transmitter Antenna Magnifies Signal
- Receiver Designed to Control Automatic Closing and Anti-Burglar Systems



### MODELS

**482S-KIT** Wireless Push Plate Switch Kit -  
SQUARE Switches

**482R-KIT** Wireless Push Plate Switch Kit -  
ROUND Switches





## SPECIFICATIONS Push Plate Switches

<b>Mounting Plate</b>	Heavy Duty 1/8" Mounting Plate
<b>Faceplate</b>	Heavy 18 Gauge, 630/US32D Satin Stainless Steel Standard
<b>Legends</b>	Bold Debossing or Engraving with Blue Infill
<b>Contacts</b>	SPDT, 15 Amps @ 125/250VAC; UL 1054, CSA Listed
<b>Depth</b>	4-1/2"" Square/ Round SPDT-3/4" deep
<b>Infill</b>	Blue, Ability Symbol, PUSH TO OPEN

## SPECIFICATIONS 400W1-433

<b>Voltage Input</b>	9V Battery (included)
<b>Trigger Input</b>	Momentary, N.O.Dry Contact
<b>Temperature</b>	-20°F — 100°F
<b>Dimensions</b>	1-9/64" x 15/16" x 7/32"

## SPECIFICATIONS 400RC433

<b>Carrier Frequency</b>	433.92 MHz
<b>Power Supply</b>	12/24 VAC/DC (Jumper select)
<b>Relay Numbers</b>	1
<b>Contacts</b>	C-NO
<b>Temperature</b>	-4°F — 158°F
<b>Dimensions</b>	1-1/4" x2" x3/4" Deep