




## 10 SERIES

### Rim Exit Device

The 10 Series **rim exit device** is super-heavy-duty panic and **fire exit hardware** for use on all types of single and double doors with mullions. The patented mounting plate and strike locator system ensures the easiest and most accurate installation of panic hardware available.

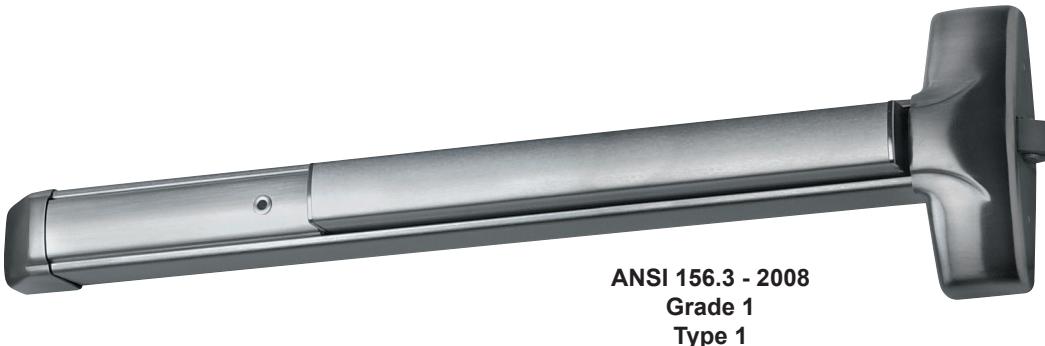

#### Benefits -

- Tough and durable design for years of trouble-free service in high-use, high-abuse environments
- Fast and accurate installation
- Minimal door prep saves time and money
- Outside trims are easily changed or re-keyed without removing device from door

#### Features -

- Patented mounting plate and strike locator system replaces paper templates
- Stainless steel deadlocking, Pullman-type latch bolt
- Tested beyond 1,000,000 cycles - Twice the cycling required for Grade 1 UL testing
- All exposed surfaces are finished over stainless steel with PVD, an environmentally-friendly finishing process
- Heavy-duty angled end-cap deflects damage away from device
- Non-handed
- Field sizeable
- 1/8 turn hex or cylinder dogging

#### Mechanical Options -

• F - 3 Hour Fire Rated	• SLR - Silencer	• 99 - Surface Strike (Std.)
• H - Hurricane Rated	• CD - Cylinder Dogging	• 98 - Semi Mortise Strike
• BP-3 Mounting plate (call factory for retrofit information)	• HD - Hex Dogging (Std.)	• 36 - Fits 36" Door Width (Std.)
• BP-5 Mounting Plate (call factory for retrofit information)	• LD - Less Dogging	• 48 - Fits 48" Door Width

#### Electrical Options -

• Exit Alarm (EA)	• Electric Unlock (EU)	• Request to Exit Weatherized (EXxW)
• Electric Dogging (ED)	• Latch Bolt Signaling (LX)	• Request to Exit Weatherized for High Voltage (EXVxW)
• Electric Integration (EI)	• Latch Bolt Signaling for High Voltage (LXV)	<b>Refer to Electrified Options section for more information</b>
• Electric Latch Retraction (ER)	• Electric Switching (ES)	
• Delayed Egress - Self Contained (EE)	• Request to Exit (EX)	
• Delayed Egress with Latch Retraction (EExER)	• Request to Exit for High Voltage (EXV)	
• Delayed Egress - Mag Lock (EM)		

## Accessories -

- GB1 - Glass Bead Kit
- SSK - Security Torx Screw Kit
- SN1 - Sex Nut Kit (2 per package)
- Trim Functions (see Outside Trims)
- Electrified Options (see Electrified Options)


## Technical Information -

- Door Types - Wood, Hollow Metal, Fiberglass or Aluminum
- Minimum Stile - 4-5/8" with standard 99 strike; 4-1/8" with optional 98 strike
- Door Thickness - Fits standard 1-3/4" - 2-1/4" doors (for other door thicknesses contact factory)
- Fasteners - Machine and Self-Drilling Screws standard


## Finishes -

605 / US3	Polished Brass	628 / US28	Aluminum Satin	693 / SPBLK	Black, Painted
606 / US4	Brushed Brass	629 / US32	Polished Stainless Steel	695 / SP 313	Dark Bronze, Painted
611 / US9	Polished Bronze	630 / US32D	Brushed Stainless Steel		
612 / US10	Brushed Bronze				
613 / US10B	Oil Rubbed Bronze				


## Single Door -

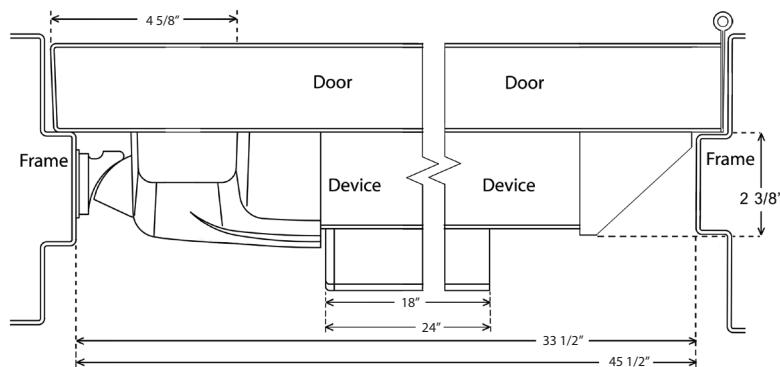

## Double Door with 90KR Mullion -



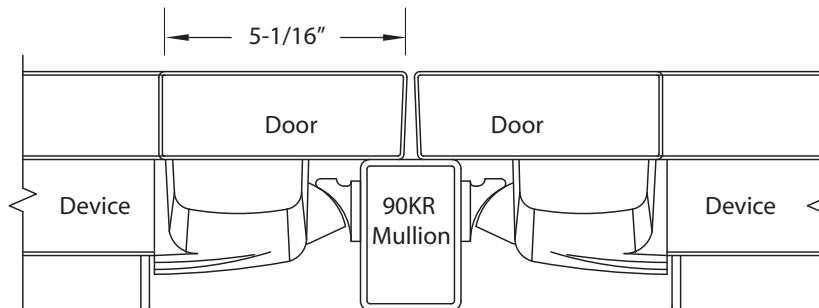


## Dimensions -

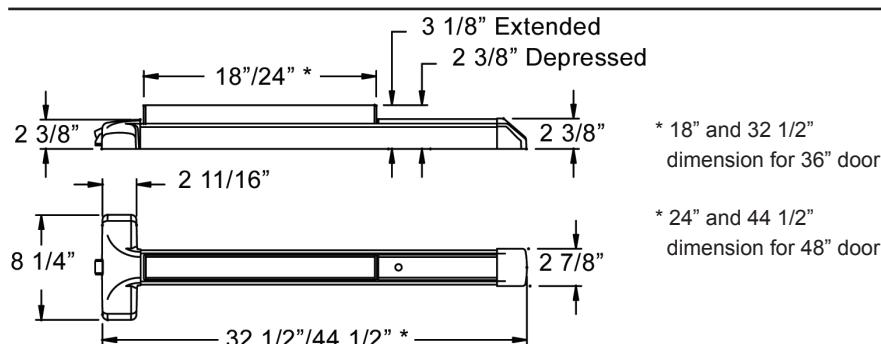

July 14, 2011

## Listings and Approvals -

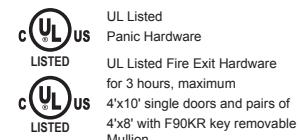

## Detex Limited Warranty -

10 Year Mechanical/3 year Electrical  
Limited Manufacturer's Warranty



Detex Corporation  
302 Detex Drive  
New Braunfels, Texas 78130-3045 USA  
PH. (830) 629-2900  
(800) 729-3839  
FAX (830) 620-6711  
(800) 653-3839  
<http://www.detex.com>  
USA Sales:  
[marketing@detex.com](mailto:marketing@detex.com)  
International Sales:  
[export@detex.com](mailto:export@detex.com)