


ELECTRIC BOLTS - ML250U SERIES BASIC FAIL-SAFE



ML250U

- Lock body : 200L*32W*36.5H mm

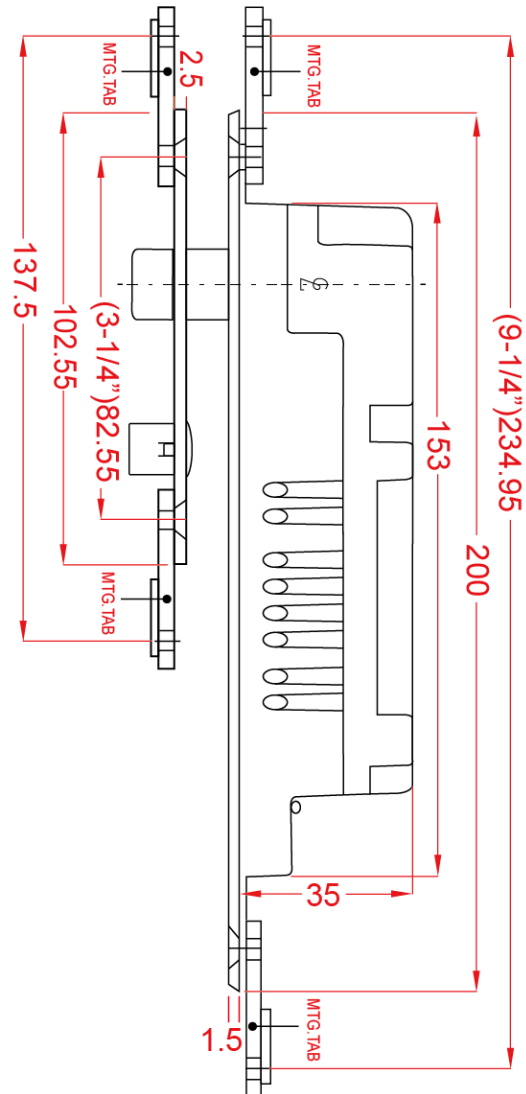

ELECTRIC
BOLTS

▼ ORDERING INFORMATION

ML250U D

Basic Door status sensor

EXAMPLE :

- ML250U : Basic , Dual LED
- ML250UD : Basic , Dual LED , Door status sensor

▼ SPECIFICATION

- Suitable for double swing door
- Fail safe : Locked when energized
- Bolt length : 16mm
- Bolt dia : 15.8mm
- Voltage : 12VDC or 24VDC (switched by jumper)
- Current Draw :
Pull-in : 1A / 12VDC , 0.6A / 24VDC
Holding : 240mA / 12VDC , 150mA/24VDC
- Dss Relay : COM,NO,NC (30VDC ; 0.2A ; MAX.3W)
- Lss Relay : COM,NO,NC (MAX ; 30VDC ; 1A)

▼ TIME DELAY

Open Delay	0sec.	3sec.	6 sec.	9 sec.
	ON	ON	ON	ON
	1 2	1 2	1 2	1 2
Close Delay	0 sec.	3 sec.	6 sec.	9 sec.

▼ VOLTAGE SWITCHING

