



EL 2012

展億科技有限公司
BILLION BEST
TECHNOLOGY
LIMITED

12V DC
POWER SUPPLY
WITH ENTRY
DELAY



EL 2012 12V DC POWER SUPPLY WITH ENTRY DELAY

WWW.BBTECH.COM.HK

POWER SOURCE:
220V AC

INPUT POINT:
RELEASE BUTTON & DOOR
MONITORING SIGNAL

ADJUSTABLE OUTPUT
VOLTAGE:
12/13V AC - DIP SWITCH

FUSE PROTECTION:
INPUT

MODE OF LOCK
OPERATION:
FAIL SAFE / FAIL SECURE -
DIP SWITCH

ENTRY DELAY:
1-20 SECONDS

ENTRY DELAY INDICATOR:
LED - GREEN

POWER INDICATOR:
LED - RED

PURPOSE:
ACCESS CONTROL
DEVICE

COLOUR:
BLACK

DIMENSIONS:
W 200 mm
H 105 mm
D 70 mm

EL 2012

12V DC


POWER SUPPLY

WITH ENTRY

DELAY



INPUT VOLTAGE	190 - 250Vac
INPUT FREQUENCY	47 - 63 HZ.
OPERATION MODE	CONTINUOUS LINER REGULATE MODE
OUTPUT VOLTAGE	12V / 13V $\pm 1\%$ - DIP SWITCH SETTING: 1V/STEP
OUTPUT CURRENT	2A CONTINUES
ENTRY DELAY	1 - 20 SEC.
MODE OF LOCK OPERATION	FAIL SAFE & FAIL SECURITY - DIP SWITCH SETTING
CONFIGURABLE	ENERGIZE / DE-ENERGIZE TO ACTIVE
LINE REGULATION	< 0.15V
LOAD REGULATION	< 0.3 V
OPERATING TEMPERATURE RANGE	0°C - +50°C

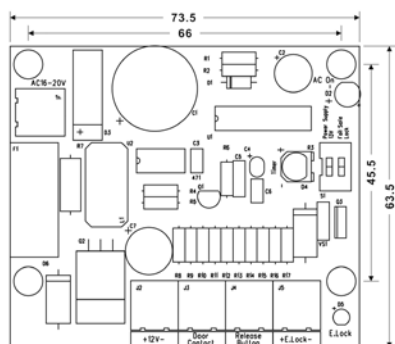

展億科技有限公司
BILLION BEST
TECHNOLOGY
LIMITED

電話 PHONE /
852. 2710. 8832

傳真 FAX /
852. 2780. 0033

電郵 EMAIL /
info@bbtech.com.hk

地址 ADDRESS /

九龍廣東道 559-561
翠玉商業大樓八字樓

Room 801, 8/F,
ade Commercial House,
559-561 Canton Road,
Kowloon, Hong Kong

WWW.BBTECH.COM.HK