



POWER SUPPLIES - PS SERIES 160W

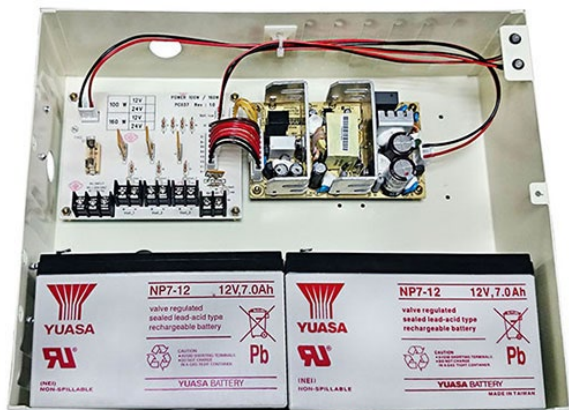

▼ ORDERING INFORMATION

PS XX XXX
 Voltage { 12V
 24V
 Watt

- PS12160 : 12V160W
- PS24160 : 24V160W



- 320L*260W*77H mm

▼ FEATURES

- Universal AC input / Full range
- Protections : Short circuit / Overload / Over voltage
- Battery low protection / Battery reverse polarity protection by fuse
- Alarm signal for AC OK and Battery low
- UPS function

Specification / Model		PS12160	PS24160
Output	DC voltage	13.8V	27.6V
	Voltage range	12~15V	24~29V
	Current range	0 ~ 11.6A@ No charge current	0 ~ 5.8A@ No charge current
	Battery charge voltage	4A (Max)	2A (Max)
	Rated power	160W	160W
Input	Voltage range	90~260V	
	Frequency range	47~63Hz	
Protection	Overcurrent	YES	
	Overvoltage	YES	
	Overload	105%~ 150% Rated output power	
	Battery cut off	<10.5V±0.5V	<21V±1V
Lights	AC OK	YES	
	Low Battery	<11V	<22V
Exterior	Dimension	320L*260W*77H mm	
Environment	Temperature	-20~50° C	Humidity : 20%~90% non-condensing