

Mortice Locks

5 Detainer Mortice Hook Bolt

3M50

Application:


- Either for timber door hinged on the left or the right or sliding doors
- Keys are suitable for use on doors up to 50mm thick
- Detainer style locks provide a higher number of key combinations than lever locks

Operation:

- Deadbolt and hookbolt is locked or unlocked by key from either side.
- The hook bolt clutches the lock to the frame, whilst a steady bolt engages with the strike and prevents the door being lifted to release the hook

Specification:

Reference	3M50
Case Size	70mm
Backset	43mm
Case	Gold powder coat
Forend	Painted gold
Box Strike Assembly	Painted to match forend
Deadbolt	One hook and one square dead, both brass
Keying Groups	Standard differ, to pass (BP codes) or masterkeyable with other detainer locks (BM codes)
Keys supplied	Standard differ supplied with 2 keys. For locks to pass or master keyed please specify number of keys required.
Key Blank Number	B-K521-S
Cut Key Number	B-DET-STD (Standard Differ)
Rebate Kit	not available

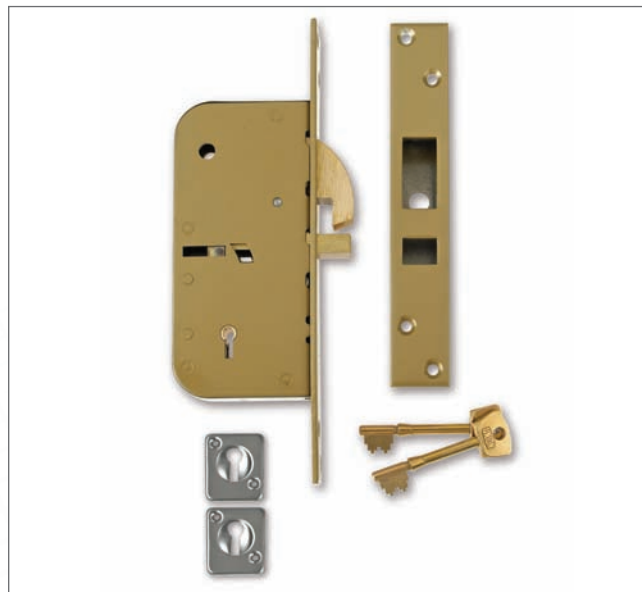

Features:

- Force resistant, anti-pick and anti-saw security features
- Available with square forend and striking plate
- Supplied a pair of stainless steel key plate escutcheons

Finishes:

- GT - Simulated brass

Standards:

- EN1634-1 assessed for use on 60 minute timber fire doors



Ordering Code Example:

B-3M50-GT-70

